

MOBILE DVR



DS-8104/8106HMI-ST

Mobile DVR

- H.264 video compression
- Up to 4CIF resolution recording
- 2x2.5-inch SATA interfaces
- Patented hard disk vibration-proof and bracing technology
- Built-in 3G (WCDMA/cdma2000) module (optional)
- Built-in GPS module



DS-8104/8108/8112HMFI-T

Mobile DVR

- H.264 video compression
- 2x2.5" pluggable SATA HDD/SSD
- Power-off protection and redundant power supply
- Built-in 3G (WCDMA/cdma2000) module
- Built-in high-sensitivity GPS module
- Various interfaces




DS-8100HMFI-TH

Mobile Hybrid DVR

- H.264 video compression
- 2x2.5" pluggable SATA HDD/SSD
- Power-off protection and redundant power supply
- Built-in 3G (WCDMA/cdma2000) module
- Built-in high-sensitivity GPS module
- Various interfaces
- Up to 4-ch IP video input at 1.3MP resolution

COMPRESSION CARD



DS-4304HFHI-E

HD1080P Compression Card

- 4-ch video&audio input
- H.264 & Dual-stream video compression
- Full channel@1920×1080P resolution real-time recording
- HDMI output at up to 1920×1080P resolution
- PCI-Ex1 2.0 standard
- OSD, LOGO and mask area settings



DS-4308/16HWI-E

Full 960H Compression Card

- 8/16-ch video&audio input
- H.264 & Dual-stream video compression
- Full channel@WD1(PAL:960×576,NTSC:960×480) resolution real-time recording
- PCI-Ex1 2.0 standard
- OSD,LOGO and MASK overlay



DS-4304/08/16HFVI-E

Full 4CIF Compression Card

- 8/16-ch video&audio input
- H.264 & Dual-stream video compression
- Full channel@4CIF resolution real-time recording
- PCI-Ext 2.0 standard
- OSD,LOGO and MASK overlay

KEYBOARD



DS-1100KI

Network Keyboard

- 7" TFT touch screen at 800×480 resolution
- Speed dome, video decoder and DVR control
- 1-ch HD bideo stream decoding at1080P
- Support 15 users, and each can operate up to 256 devices
- USB 2.0 interface for video backup



DS-1004KI

RS-485 Keyboard

- Incorporate all DVR menu control function
- Control DVR and PTZ separately
- Support DVR and keyboard cascading
- Setting and calling the preset, patrol, and pattern.
- Switch the TV wall display and set the TV wall layout.
- Video switch control for the analog matrix



DS-A81016S

Network Storage System

- High performance with 64 bit RISC processor
- Up to 16 HDD, each disk up to 4TB capacity
- Support up to 180-ch 4CIF real-time recording
- iSCSI/NFS/CIFS/FTP/HTTP/AFP protocols
- RAID 0, 1, 3, 5, 10, 50 and HDD hotswap supported
- Dual Gigabit network interfaces
- Modularization and redundant power design for highest reliability



www.hikvision.com

Headquarters

No.700 Donglu Road, Binjiang District,
Hangzhou 310052, China

Tel: +86-571-8807-5998
Email: overseasbusiness@hikvision.com

Hikvision USA
Tel: +1-909-895-0400
Email: sales@hikvisionusa.com

Hikvision India
Tel: +91-22-28469900
Email: sales@pramahikvision.com

Hikvision Europe
Tel: +31-23-5542770
Email: saleseuro@hikvision.com

Hikvision Italy
Tel: +39-0438-6902
Email: info.it@hikvision.com

Hikvision Middle East
Tel: +971-4-8847628
Email: salesme@hikvision.com

Hikvision Singapore
Tel: +65-66844718
Email: sg@hikvision.com

Hikvision Russia
Tel: +7-812-313-19-63
Email: salesru@hikvision.com

Hikvision Hong Kong
Tel: +852-2151-1761
Email: sg@hikvision.com

Simplify Your Network Surveillance

DS-7600NI-SE/P
DS-7600NI-SP
DS-7700NI-SP

PLUG
AND
PLAY



Watch what you want Closely and Smartly

The Smart HD PTZ Dome



DS-2DF5286
DS-2DF5276

DS-2DF7286
DS-2DF7276

Mini Packs a Big Punch

The compact-sized
Full HD PTZ Dome



Little And Loaded Full 960H Entry-level 1U DVR



DS-7204/08/16HWI-SH
DS-7208/16HWI-SL

Smart Evolution in IP Surveillance

4-line smart IPC

- Smart Codec
- Smart Detection
- Smart Control



Break Analog World Limits HiWatch 960H Solution



Full HD with Analog Simplicity

Hikvision **HD-SDI** solution



Nothing fishy happens When it is on the watch

3MP WDR IR Fisheye Camera
6MP IR Fisheye Camera



DS-2CD6362F-I
DS-2CD6332FWD-I

PTZ DOME CAMERA

SMART



DS-2DF7286

2MP, 30X Network IR PTZ Dome Camera

- 1080P Full HD, 30X Optical Zoom
- 150m IR distance
- Smart Tracking, Defog
- ROI encoding
- HLC/BLC, 3D DNR, D WDR
- 3D intelligent positioning
- 3-Streams
- IP 66
- 24VAC / High-PoE



DS-2DF7284

2MP, 20X Network IR PTZ Dome Camera

- 1080P Full HD, 20X Optical Zoom
- 150m IR distance
- Smart Tracking, Defog
- ROI encoding
- HLC/BLC, 3D DNR, D WDR
- 3D intelligent positioning
- 3-Streams
- IP 66
- 24VAC / High-PoE



DS-2DF5286

2MP, 30X Network PTZ Dome Camera

- 1080P Full HD, 30X Optical Zoom
- 150m IR distance
- Smart Tracking, Defog
- ROI encoding
- HLC/BLC, 3D DNR, D WDR
- 3D intelligent positioning
- 3-Streams
- IP 66(outdoor models)
- 24VAC / PoE+(IEEE 802.3at)



DS-2DF5284

2MP, 20X Network PTZ Dome Camera

- 1080P Full HD, 20X Optical Zoom
- Smart Tracking, Defog
- ROI encoding
- HLC/BLC, 3D DNR, D WDR
- 3D intelligent positioning
- 3-Streams
- IP 66(outdoor models)
- 24VAC / PoE+(IEEE 802.3at)



DS-2DF7276

1.3MP, 30X Network IR PTZ Dome Camera

- 1280×960 HD, 30X Optical Zoom
- 150m IR distance
- Smart Tracking, Defog
- ROI encoding
- HLC/BLC, 3D DNR, D WDR
- 3D intelligent positioning
- 3-Streams
- IP 66
- 24VAC / High-PoE



DS-2DF7274

1.3MP, 20X Network IR PTZ Dome Camera

- 1280×960 HD, 20X Optical Zoom
- 150m IR distance
- Smart Tracking, Defog
- ROI encoding
- HLC/BLC, 3D DNR, D WDR
- 3D intelligent positioning
- 3-Streams
- IP 66
- 24VAC / PoE+(IEEE 802.3at)



DS-2DF5276

1.3MP, 30X Network PTZ Dome Camera

- 1280×960 HD, 20X Optical Zoom
- 150m IR distance
- Smart Tracking, Defog
- ROI encoding
- HLC/BLC, 3D DNR, D WDR
- 3D intelligent positioning
- 3-Streams
- IP 66(outdoor models)
- 24VAC / PoE+(IEEE 802.3at)



DS-2DF5274

1.3MP, 20X Network PTZ Dome Camera

- 1280×960 HD, 20X Optical Zoom
- Smart Tracking, Defog
- ROI encoding
- HLC/BLC, 3D DNR, D WDR
- 3D intelligent positioning
- 3-Streams
- IP 66(outdoor models)
- 24VAC / PoE+(IEEE 802.3at)



DS-2AF7268

700TVL, 36X Analog IR PTZ Dome Camera

- 700 TVL, 36X Optical Zoom
- 150m IR distance
- Smart Tracking
- 3D DNR, DWDR
- 3D intelligent positioning
- IP 66



DS-2AF7264

700TVL, 23X Analog IR PTZ Dome Camera

- 700 TVL, 23X Optical Zoom
- 150m IR distance
- Smart Tracking
- 3D DNR, DWDR
- 3D intelligent positioning
- IP 66



DS-2AF5268

700TVL, 36X Analog PTZ Dome Camera


- 700 TVL, 36X Optical Zoom
- Smart Tracking
- 3D DNR, DWDR
- 3D intelligent positioning
- IP 66(outdoor models)



DS-2AF5264

700TVL, 23X Analog PTZ Dome Camera

- 700 TVL, 36X / 23X Optical Zoom
- 100m IR distance
- 3D DNR, DWDR
- 3D intelligent positioning
- IP 66



DS-2DF7283

2MP WDR Network IR PTZ Dome Camera


- 1080P Full HD, 20X Optical Zoom
- WDR
- 150m IR distance
- 3D DNR, ROI
- 3D intelligent positioning
- IP 66



DS-2DF5283

2MP WDR Network PTZ Dome Camera


- 1080P Full HD, 20X Optical Zoom
- WDR
- 3D DNR, ROI
- 3D intelligent positioning
- IP 66



DS-2DF727A

1MP WDR Network IR PTZ Dome Camera



- 1280×720 HD, 18X Optical Zoom
- WDR
- 150m IR distance
- 3D DNR, ROI
- 3D intelligent positioning
- IP 66



DS-2DF527A

1MP WDR Network PTZ Dome Camera

- 1/3" Progressive Scan CCD
- 1280×720 HD, 18X Optical Zoom
- WDR
- 3D DNR, ROI
- 3D intelligent positioning
- IP 66

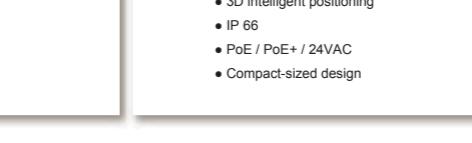

DS-2DE7186

2MP, 30X Network IR PTZ Dome Camera

- 1/2.8" Progressive Scan CMOS
- 1080P Full HD, 30X Optical Zoom
- 100m IR distance
- 3D DNR, D WDR
- 3D intelligent positioning
- IP 66
- 24VAC / High-PoE



DS-2DE7184

2MP, 20X Network IR PTZ Dome Camera

- 1/2.8" Progressive Scan CMOS
- 1080P Full HD, 20X Optical Zoom
- 100m IR distance
- 3D DNR, D WDR
- 3D intelligent positioning
- IP 66
- 24VAC / High-PoE



DS-2DE5186

2MP, 30X Network PTZ Dome Camera

- 1/2.8" Progressive Scan CMOS
- 1280×960 HD, 30X Optical Zoom
- 100m IR distance
- 3D DNR, D WDR
- 3D intelligent positioning
- IP 66(outdoor models)
- 24VAC / PoE+(IEEE 802.3at)



DS-2DE5174

2MP, 20X Network PTZ Dome Camera

- 1/2.8" Progressive Scan CMOS
- 1280×960 HD, 20X Optical Zoom
- 100m IR distance
- 3D DNR, D WDR
- 3D intelligent positioning
- IP 66
- 24VAC / High-PoE



DS-2DE5176

1.3MP, 30X Network IR PTZ Dome Camera

- 1/3" Progressive Scan CMOS
- 1280×960 HD, 30X Optical Zoom
- 100m IR distance
- 3D DNR, D WDR
- 3D intelligent positioning
- IP 66
- 24VAC / High-PoE



DS-2DE5174

1.3MP, 20X Network PTZ Dome Camera


- 1/3" Progressive Scan CMOS
- 1280×960 HD, 20X Optical Zoom
- 100m IR distance
- 3D DNR, D WDR
- 3D intelligent positioning
- IP 66
- 24VAC / High-PoE



DS-2DE5176

1.3MP, 30X Network PTZ Dome Camera

- 1/3" Progressive Scan CMOS
- 1280×960 HD, 30X Optical Zoom
- 100m IR distance
- 3D DNR, D WDR
- 3D intelligent positioning
- IP 66
- 24VAC / High-PoE



DS-2AE7168

700TVL, 36X Analog IR PTZ Dome Camera

- 700 TVL, 36X / 23X Optical Zoom
- 100m IR distance
- 3D DNR, DWDR
- 3D intelligent positioning
- IP 66



DS-2AE7164

700TVL, 23X Analog PTZ Dome Camera


- 700 TVL, 36X Optical Zoom
- 100m IR distance
- 3D DNR, DWDR
- 3D intelligent positioning
- IP 66



DS-2AE5168

700TVL, 23X Analog PTZ Dome Camera


- 700 TVL, 23X Optical Zoom
- 3D DNR, DWDR
- 3D intelligent positioning
- IP 66(outdoor models)

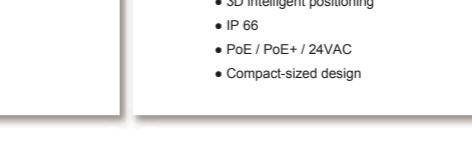

DS-2AF4262

650TVL, 12X Analog PTZ Dome Camera

- 650 TVL, 12X Optical Zoom
- 3D DNR, DWDR
- 3D intelligent positioning
- IP 66
- Compact-sized design

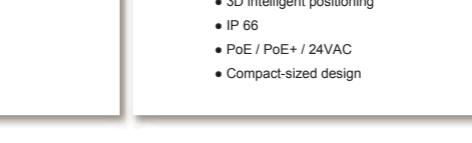

NETWORK CAMERA

 smart IPC

2-LINE NETWORK CAMERA



DS-2CD2012-I (1.3MP)

DS-2CD2032-I (3.0MP)

IR Mini Bullet Camera

- HD real-time video
- Up to 30m IR visibility
- 0 Lux with IR
- IP66
- 3D DNR, DWDR, BLC
- 3D DNR, DWDR, BLC



DS-2CD2112-I (1.3MP)

DS-2CD2132-I (3.0MP)

IR Fix Dome Camera

- HD real-time video
- Up to 30m IR visibility
- 0 Lux with IR
- IP66
- 3D DNR, DWDR, BLC
- Vandal-proof



DS-2CD2212-I5 (1.3MP)

DS-2CD2232-I5 (3.0MP)

EXiR Bullet Camera

- HD real-time video
- EXiR: up to 50m visibility
- IP66
- 3D DNR, DWDR, BLC
- 3D DNR, DWDR, BLC



DS-2CD2312-I (1.3MP)

DS-2CD2332-I (3.0MP)

EXiR Turret Camera

- HD real-time video
- EXiR: up to 30m visibility
- IP66
- 3D DNR, DWDR, BLC
- 3D DNR, DWDR, BLC



DS-2CD4012F(-A)

1.4MP Low-light Box Camera

- 1280x1024 resolution
- HD720p (60fps)
- Triple streams
- Audio/Alarm IO
- DWDR/3D DNR/HLC
- ABF optional (-A)



DS-2CD4012FWD(-A)

1.3MP WDR Box Camera

- 1280x960 resolution
- HD720p
- Triple streams
- Audio/Alarm IO
- 120dB WDR
- ABF optional (-A)



DS-2CD4024F(-A)

2MP Full HD Box Camera

- 1920x1080 resolution
- Full HD1080p
- Triple streams
- Audio/Alarm IO
- DWDR/3D DNR/HLC
- ABF optional (-A)



DS-2CD4032FWD(-A)

3MP WDR Box Camera

- 2048x1536 resolution
- Full HD1080p
- Triple streams
- Audio/Alarm IO
- 120dB WDR
- ABF optional (-A)



DS-2CD2612F-I(S) (1.3MP)

DS-2CD2632F-I(S) (3.0MP)

VF IR Bullet Camera

- HD real-time video
- Up to 30m IR visibility
- 3D DNR, DWDR, BLC
- SD/SDHC/SDXC Card Slot (up to 64GB)
- IP66 & Vandal-proof
- Audio I/O, Alarm I/O(-S)



DS-2CD2712F-I(S) (1.3MP)

DS-2CD2732F-I(S) (3.0MP)

VF IR Dome Camera

- HD real-time video
- Up to 30m IR visibility
- 3D DNR, DWDR, BLC
- SD/SDHC/SDXC Card Slot (up to 64GB)
- IP66 & Vandal-proof
- Audio I/O, Alarm I/O(-S)



DS-2CD2412F-I(W) (1.3MP)

DS-2CD2532F-I(S)(W) (3.0MP)

IR Cube Camera

- HD real-time video
- Up to 10m IR visibility
- PIR
- 3D DNR, DWDR, BLC
- SD/SDHC/SDXC Card Slot (up to 64GB)
- IP66
- Audio, Alarm I/O
- Wi-Fi optional(-W)
- DS-2CD2510F: no IR model



DS-2CD2512F-I(S)(W) (1.3MP)

DS-2CD4112F-I (Z) 1.4MP Low-light Indoor Dome Network Camera

- 1280x1024 resolution
- HD720p (60fps)
- 2.8~12mm/F1.4 VF lens
- Triple streams
- Audio/Alarm IO
- DWDR/3D DNR/HLC
- Vandal-proof
- Motorized VF lens (-Z)



DS-2CD4112FWD-I (Z) 1.3MP WDR Indoor Dome Network Camera

- 1280x960 resolution
- HD720p
- 2.8~12mm/F1.4 VF lens
- Triple streams
- Audio/Alarm IO
- 120dB WDR
- Vandal-proof
- Motorized VF lens (-Z)



DS-2CD4124F-I (Z) 2MP Full HD Indoor Dome Network Camera

- 1920x1080 resolution
- Full HD1080p
- 2.8~12mm/F1.4 VF lens
- Triple streams
- Audio/Alarm IO
- DWDR/3D DNR/HLC
- Vandal-proof
- Motorized VF lens (-Z)



DS-2CD4132FWD-I (Z) 3MP WDR Indoor Dome Network Camera

- 2048x1536 resolution
- Full HD1080p
- 2.8~12mm/F1.4 VF lens
- Triple streams
- Audio/Alarm IO
- 120dB WDR
- Vandal-proof
- Motorized VF lens (-Z)

6-LINE NETWORK CAMERA



DS-2CD6332FWD-I

3MP WDR IR Fisheye Camera

- Up to 2048x1536 resolution
- 360° panoramic view
- Multiple viewing modes
- Virtual PTZ
- Up to 15m IR
- Support onboard storage
- IP66 model optional



DS-2CD6362F-I

6MP IR Fisheye Camera

- Up to 3072x2048 resolution
- 360° panoramic view
- Multiple viewing modes
- Virtual PTZ
- Up to 15m IR
- Support onboard storage



DS-2CD6412FWD-10/20

1.3MP WDR Pinhole Camera

- 1280x960 resolution
- 10/20m IR
- Support onboard storage
- Virtual PTZ
- Up to 15m IR
- Support onboard storage



DS-2CD6412FWD-30

1.3MP WDR Tube Camera

- 1280x960 resolution
- 120dB WDR
- Support onboard storage
- Triple streams
- 3D DNR



DS-2CD4212F-I (Z/S/H)

1.4MP Low-light IR Bullet Network Camera

- 1280x1024 resolution
- HD720p (60fps)
- 2.8~12mm/F1.4 VF lens
- Triple streams
- DWDR/3D DNR/HLC
- IP66
- Motorized VF lens (-Z)
- Audio/Alarm IO (-S)
- Built-in heater (-H)



DS-2CD4212FWD-I (Z/S/H)

1.3MP WDR Indoor Dome Network Camera

- 1280x960 resolution
- HD720p
- 2.8~12mm/F1.4 VF lens
- Triple streams
- 120dB WDR
- IP66
- Motorized VF lens (-Z)
- Audio/Alarm IO (-S)
- Built-in heater (-H)



DS-2CD4224F-I (Z/S/H)

2MP Full HD IR Bullet Network Camera

- 1920x1080 resolution
- Full HD1080p
- 2.8~12mm/F1.4 VF lens
- Triple streams
- DWDR/3D DNR/HLC
- IP66
- Motorized VF lens (-Z)
- Audio/Alarm IO (-S)
- Built-in heater (-H)



DS-2CD4232FWD-I (Z/S/H)

2MP WDR IR Bullet Network Camera

- 2048x1536 resolution
- Full HD1080p
- 2.8~12mm/F1.4 VF lens
- Triple streams
- 120dB WDR
- IP66
- Motorized VF lens (-Z)
- Audio/Alarm IO (-S)
- Built-in heater (-H)



TV0550D-MPIR

Mega-pixel Auto-Iris Lens

- 5~50mm Vari-focal
- IR Correction
- F1.6, CS Mount
- 1/2.7" Format



TV2712D-MPIR

Mega-pixel Auto Iris Lens


- 2.7~12mm Vari-focal
- IR Correction
- F1.2, CS Mount
- 1/2.7" Format



TV2810D-MPIR

Mega-pixel Auto Iris Lens

- 2.8~10mm Vari-focal
- IR correction
- F1.4, CS mount
- 1/2.7" format

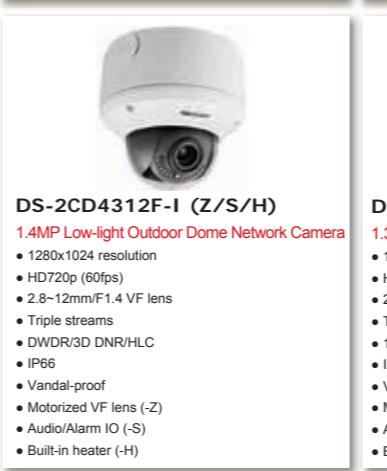

DS-2CD4312F-I (Z/S/H)

1.4MP Low-light Outdoor Dome Network Camera

- 1280x1024 resolution
- HD720p (60fps)
- 2.8~12mm/F1.4 VF lens
- Triple streams
- DWDR/3D DNR/HLC
- IP66
- Vandal-proof
- Motorized VF lens (-Z)
- Audio/Alarm IO (-S)
- Built-in heater (-H)



DS-2CD4312FWD-I (Z/S/H)

1.3MP WDR Outdoor Dome Network Camera

ANALOG CAMERA

720TVL PLCADIS/EXIR



DS-2CE16C2P(N)-IT1/IT3/IT5

720TVL PICADIS EXIR Outdoor Bullet Camera
 • 1/3" PICADIS
 • True Day/Night
 • 0.1 lux /F1.2
 • Smart IR, high dynamic range
 • Superior video image output and ultra low light illumination
 • 20m/40m/80m IR Distance



DS-2CE56C2P(N)-IT1/IT3

720TVL PICADIS EXIR Outdoor Dome Camera
 • 1/3" PICADIS
 • True Day/Night
 • 0.1 lux /F1.2
 • Smart IR, high dynamic range
 • Superior video image output and ultra low light illumination
 • 20/40m IR Distance

720TVL PLCADIS



DS-2CE15C2P(N)-VFIR3

720TVL PICADIS Vari-focal IR Outdoor Bullet
 • 1/3" PICADIS
 • True Day/Night
 • 0.1 lux /F1.2
 • Smart IR, high dynamic range
 • Superior video image output and ultra low light illumination
 • 2.8 ~ 12mm vari-focal lens
 • 40m IR distance



DS-2CE55C2P(N)-VFIR3

720TVL PICADIS Vari-focal IR Outdoor Dome
 • 1/3" PICADIS
 • True Day/Night
 • 0.1 lux /F1.2
 • Smart IR, high dynamic range
 • Superior video image output and ultra low light illumination
 • 2.8 ~ 12mm vari-focal lens
 • 40m IR distance
 • Smart IR, high dynamic range

1.3MP HD-SDI CAMERA



DS-2CC12C2S-IR

1.3 MP IR Bullet Camera
 • 1.3 MP CMOS Image Sensor
 • HD720p video output
 • True Day/Night
 • 2.8 ~ 12mm vari-focal lens
 • 40m IR distance
 • Smart IR, high dynamic range



DS-2CC52C2S-IRM

1.3 MP IR Dome Camera
 • 1.3 MP CMOS Image Sensor
 • HD720p Video Output
 • True Day/Night
 • Digital Wide Dynamic Range
 • 20m IR Distance
 • IP66 Weatherproof



DS-2CC52C1S-VPIR

1.3 MP Outdoor Vandal Proof IR Dome Camera
 • 1.3 MP CMOS Image Sensor
 • HD720p Video Output
 • True Day/Night
 • Digital Wide Dynamic Range
 • 20m IR Distance
 • IP66 Weatherproof and Vandal Proof



DS-2CC12C2S-IT3/5

1.3 MP EXIR Bullet Camera
 • 1.3 MP CMOS Image Sensor
 • HD720p video output
 • True Day/Night
 • 2.8 ~ 12mm vari-focal lens
 • 40m IR distance
 • Smart IR, high dynamic range
 • Superior video image output and ultra low light illumination
 • 40/80m IR Distance with EXIR technology
 • IP66 Weatherproof

720TVL PLCADIS



DS-2CE55C2P(N)

720 TVL PICADIS Indoor Dome Camera

- 1/3" PICADIS
- 720 TVL Horizontal Resolution
- Electronic Day/Night
- 3.6/6mm Fixed Lens
- 0.1 lux /F1.2
- 20m IR Distance



DS-2CE55C2P(N)-IRP

720 TVL PICADIS Indoor IR Dome Camera

- 1/3" PICADIS
- 720 TVL Horizontal Resolution
- True Day/Night
- 3.6/6mm Fixed Lens, 0.1 lux /F1.2
- 20m IR Distance



DS-2CE15C2P(N)-IR

720 TVL PICADIS Outdoor IR Bullet Camera

- 1/3" PICADIS
- 720 TVL Horizontal Resolution
- True Day/Night
- 3.6/6mm Fixed Lens, 0.1 lux /F1.2
- 20m IR Distance



DS-2CE55C2P(N)-IRM

720 TVL PICADIS Outdoor IR Dome Camera

- 1/3" PICADIS
- 720 TVL Horizontal Resolution
- True Day/Night
- 3.6/6mm Fixed Lens, 0.1 lux /F1.2
- 20m IR Distance

2MP HD-SDI CAMERA



DS-2CC12D5S-IR

2 MP IR Bullet Camera

- Full HD1080p Video Output
- True Day/Night
- Digital WDR, Privacy Masking, Eclipse
- OSD Menu
- 20m IR Distance
- IP66 Weatherproof



DS-2CC52D5S-IRM

2 MP IR Dome Camera

- Full HD1080p Video Output
- True Day/Night
- Digital WDR, Privacy Masking, Eclipse
- OSD Menu
- 20m IR Distance
- IP66 Weatherproof



DS-2CC52D5S-VPIR

2 MP Outdoor Vandal Proof IR Dome Camera

- Full HD1080p Video Output
- True Day/Night
- Digital WDR, Privacy Masking, Eclipse
- OSD Menu
- 20m IR Distance
- IP66 Weatherproof and Vandal Proof



DS-2CC12D5S-IT3/5

2 MP EXIR Bullet Camera
 • Full HD1080p Video Output
 • True Day/Night
 • 2.8 ~ 12mm vari-focal lens
 • 40/80m IR Distance with EXIR technology
 • IP66 Weatherproof

700TVL DIS/EXIR



DS-2CE16A2P(N)-IT1/IT3/IT5

700TVL EXIR Outdoor Bullet Camera
 • 1/3" DIS
 • True Day/Night
 • 0.1 lux /F1.2
 • Smart IR
 • 20m/40m/80m IR Distance



DS-2CE56A2P(N)-IT1/IT3

700TVL EXIR Outdoor Dome Camera
 • 1/3" DIS
 • True Day/Night
 • 0.1 lux /F1.2
 • Smart IR
 • 20m IR Distance

700TVL DIS



DS-2CE15A2P(N)-VFIR3

700TVL DIS Vari-focal IR Outdoor Bullet Camera
 • 1/3" DIS
 • True Day/Night
 • 2.8 ~ 12mm vari-focal lens
 • 40m IR distance



DS-2CE55A2P(N)-VFIR3

700TVL DIS Vari-focal IR Outdoor Dome Camera
 • 1/3" DIS
 • True Day/Night
 • 2.8 ~ 12mm vari-focal lens
 • 40m IR distance

2MP HD-SDI CAMERA



DS-2CC52D5S-IT3

2 MP EXIR Dome Camera

- Full HD1080p Video Output
- True Day/Night
- Digital WDR, Privacy Masking, Eclipse
- OSD Menu
- 40m IR Distance with EXIR technology
- IP66 Weatherproof



DS-2CC51D5S-AVPIR

2 MP Vari-focal Outdoor Vandalproof IR Dome

- Full HD1080p Video Output
- 2.8 ~ 12mm Vari-focal Lens
- Digital WDR, Privacy Masking, Eclipse
- OSD Menu & True Day/Night
- 40m IR Distance
- Dual Voltage: 12 VDC / 24 VAC
- IP66 Weatherproof and Vandal Proof



DS-2CC12A2P(N)-IT3/IT5

700TVL EXIR Outdoor Bullet Camera
 • 1/3" SONY CCD
 • Electronic Day/Night
 • 0.001 lux /F1.2, 0.002 lux /F1.8
 • Smart IR, high dynamic range
 • Superior video image output and ultra low light illumination
 • 40m/80m IR Distance



DS-2CC52A2P(N)-IT3

700TVL EXIR Outdoor Dome Camera
 • 1/3" SONY CCD
 • Electronic Day/Night
 • 0.001 lux /F1.2, 0.002 lux /F1.8
 • Smart IR, high dynamic range
 • Superior video image output and ultra low light illumination
 • 40m IR Distance

700TVL DIS



DS-2CE15A2P(N)-IR

700 TVL Outdoor IR Bullet Camera
 • 1/3" DIS
 • 700 TVL Horizontal Resolution
 • True Day/Night
 • 2.8/3.6/6mm Fixed Lens, 0.1 lux /F1.2
 • 20m IR Distance



DS-2CE55A2P(N)

700 TVL Indoor Dome Camera
 • 1/3" DIS
 • 700 TVL Horizontal Resolution
 • True Day/Night
 • 2.8/3.6/6mm Fixed Lens
 • 0.1 lux /F1.2



DS-2CE55A2P(N)-IRP

700 TVL Indoor IR Dome Camera
 • 1/3" DIS
 • 700 TVL Horizontal Resolution
 • True Day/Night
 • 2.8/3.6/6mm Fixed Lens, 0.1 lux /F1.2
 • 20m IR Distance



DS-2CE55A2P(N)-IRM

700 TVL Outdoor IR Dome Camera
 • 1/3" DIS
 • 700 TVL Horizontal Resolution
 • True Day/Night
 • 2.8/3.6/6mm Fixed Lens, 0.1 lux /F1.2
 • 20m IR Distance

600/700TVL ccd



DS-2CC1181/11A1P(N)-(A)

600/700 TVL High Definition Box Camera
 • 1/3" SONY CCD
 • True Day/Night (DS-2CC1181/11A1P(N)-(A))
 • OSD Menu
 • DNR, Digital WDR, EIS
 • 12 VDC / 24 VAC (DS-2CC1181/11A1P(N)-(A))



DS-2CC5281/52A1P(N)-AVPIR2

600/700 TVL Vandal proof IR Dome Camera
 • 1/3" SONY CCD
 • True Day/Night
 • 2.8 ~ 12mm Vari-focal Lens
 • OSD Menu, DNR, Smart IR, Digital WDR, Eclipse
 • 30m IR Distance
 • IP66 Weatherproof



DS-2CC5281/52A1P(N)-VP

600/700 TVL Vandal proof Dome Camera
 • 1/3" SONY CCD
 • True Day/Night
 • 2.8 ~ 12mm Vari-focal Lens
 • OSD Menu, DNR, Smart IR, Digital WDR, Eclipse
 • 40m IR Distance
 • 12 VDC / 24 VAC (DS-2CC5281/52A1P(N)-VP)
 • IP66 Weatherproof



DS-2CC1281/12A1P(N)-(A)VFIR3

600/700 TVL IR Bullet Camera
 • 1/3" SONY CCD
 • True Day/Night (DS-2CC1281/12A1P(N)-VFIR3)
 • 2.8 ~ 12mm Vari-focal Lens
 • OSD Menu, DNR, Smart IR, Digital WDR, Eclipse
 • 40m IR Distance
 • 12 VDC / 24 VAC (DS-2CC1281/12A1P(N)-VFIR3)
 • IP66 Weatherproof

NVR & DVR



DS-7604/08/16NI-SE/P

Embedded PoE 1U NVR

- 20/40Mbps Bit Rate Input Max(up to 4/8/16-ch IP video)
- Third-party network cameras supported
- Up to 5 Megapixels resolution recording
- HDMI and VGA output at up to 1920×1080P resolution
- 4/8 independent PoE network interfaces
- 2 SATA, 2 USB2.0



DS-7104/08/16HWI-SH(SL)

Full 960H Entry-level Mini 1U DVR

- 4/8/16-ch video&1-ch audio input
- H.264 & Dual-stream video compression
- Full channel@WD1(PAL:960×576,NTSC:960×480) resolution real-time recording
- HDMI and VGA output at up to 1920×1080P resolution
- 4/8 independent PoE network interfaces
- 2 SATA, 2 USB2.0
- *-SL series without HDMI output interface



DS-7204/08/16HWI-SL

Full 960H Entry-level 1U DVR

- 4/8/16-ch video&1-ch audio input
- H.264 & Dual-stream video compression
- Full channel@WD1(PAL:960×576,NTSC:960×480) resolution real-time recording
- HDMI and VGA output at up to 1920×1080P resolution
- 1 SATA, 2 USB2.0
- *-SL series without HDMI output interface



DS-9632/64NI-XT

Embedded 16HDD 3U NVR

- 160Mbps Bit Rate Input Max(up to 32/64-ch IP video)
- Third-party network cameras supported
- Up to 5 Megapixels resolution recording
- HDMI and VGA output at up to 1920×1080P resolution
- Support RAID0, 1, 5, 10
- Dual Gigabit network interfaces
- 8 SATA, 1 eSATA, 3 USB2.0
- *-RT series support RAID0, 1, 5, 10



DS-9632/64NI-ST(-RT)

Embedded 2U NVR

- 160Mbps Bit Rate Input Max(up to 32/64-ch IP video)
- Third-party network cameras supported
- Up to 5 Megapixels resolution recording
- HDMI and VGA output at up to 1920×1080P resolution
- Support RAID0, 1, 5, 10
- Dual Gigabit network interfaces
- 8 SATA, 1 eSATA, 3 USB2.0
- *-RT series support RAID0, 1, 5, 10



DS-9532NI-ST(RT)

Embedded 2U NVR

- 160Mbps Bit Rate Input Max(up to 32-ch IP video)
- Third-party network cameras supported
- Up to 5 Megapixels resolution recording
- None local output interface
- Dual Gigabit network interfaces
- 8 SATA, 1 eSATA, 3 USB2.0
- *-RT series support RAID0, 1, 5, 10

HYBRID DVR



DS-9004/08/16HFI-ST(RT)

Full 4CIF 2U Hybrid DVR

- Up to 8/16/32-ch (Analog video + IP video) input
- H.264 & Dual-stream video compression
- Full channel@4CIF real-time analog video recording
- Up to 5 Megapixels resolution IP video recording
- Third-party network cameras supported
- HDMI and VGA output at up to 1920×1080P resolution
- 8 SATA, 1 eSATA, 3 USB2.0
- *-RT series support RAID0, 1, 5, 10



DS-8004/08/16HFI-ST

Full 4CIF 2U Hybrid DVR

- Up to 8/16/32-ch (Analog video + IP video) input
- H.264 & Dual-stream video compression
- Full channel@4CIF real-time analog video recording
- Up to 5 Megapixels resolution IP video recording
- Third-party network cameras supported
- HDMI output at up to 1920×1080P resolution
- 8 SATA, 1 eSATA, 3 USB2.0



DS-7604/08/16HI-ST

Full 4CIF 1U Hybrid DVR

- Up to 8/16/32-ch (Analog video + IP video) input
- H.264 & Dual-stream video compression
- Full channel@4CIF real-time analog video recording
- Up to 5 Megapixels resolution IP video recording
- Third-party network cameras supported
- HDMI output at up to 1920×1080P resolution
- 1 SATA(DS-7604HI-ST)/2 SATA(DS-7608/16HI-ST), 2 USB2.0



DS-7716/32NI-ST(SP)

Embedded 1.5U PoE NVR


- 80/160Mbps Bit Rate Input Max(up to 16/32-ch IP video)
- Third-party network cameras supported
- Up to 5 Megapixels resolution recording
- HDMI and VGA output at up to 1920×1080P resolution
- 4 SATA, 3 USB2.0
- *-SP series support 8/16 independent PoE network interfaces



DS-7604/08/16NI-V(-VP)

Embedded 1U PoE Vertical NVR

- 20/40/80Mbps Bit Rate Input Max(up to 4/8/16-ch IP video)
- Third-party network cameras supported
- Vertical design for easy HDD installation and HDD hot-swap supported
- HDMI and VGA output at up to 1920×1080P resolution
- 2 SATA, 2 USB2.0
- *-VP series support 4 independent PoE network interfaces

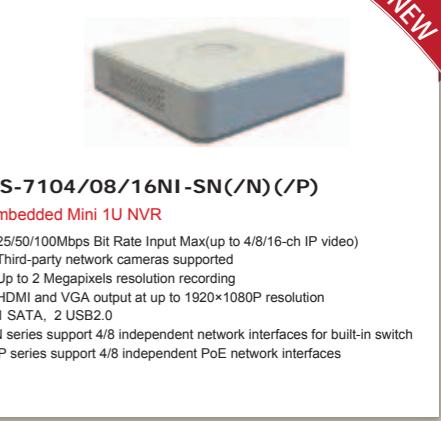

DS-7104/08/16NI-SN(/N)(/P)

Embedded Mini 1U NVR

- 25/50/100Mbps Bit Rate Input Max(up to 4/8/16-ch IP video)
- Third-party network cameras supported
- Up to 2 Megapixels resolution recording
- HDMI and VGA output at up to 1920×1080P resolution
- 1 SATA, 2 USB2.0
- *-N series support 4/8 independent network interfaces for built-in switch
- *-/P series support 4/8 independent PoE network interfaces

HD-SDI DVR



DS-8104/08/16HFHI-ST

1080P HD-SDI 2U DVR

- 4/8/16-ch HD-SDI video&audio input
- H.264 & Dual-stream video compression
- 1920×1080P resolution real-time recording
- HDMI and VGA output at up to 1920×1080P resolution
- Dual Gigabit network interfaces
- HDD quota and group management
- 8 SATA, 1 eSATA, 3 USB2.0



DS-7304/08/16HFHI-ST

1080P HD-SDI 1.5U DVR

- 4/8/16-ch HD-SDI video&audio input
- H.264 & Dual-stream video compression
- 1920×1080P resolution real-time recording
- HDMI and VGA output at up to 1920×1080P resolution
- Gigabit network interfaces
- HDD quota and group management
- 4 SATA, 1 eSATA, 3 USB2.0



DS-7204/08/16HFHI-ST(-SL)

HD-SDI 1U DVR

- 4/8-ch HD-SDI video&audio input
- H.264 & Dual-stream video compression
- 1920×1080P resolution real-time recording
- Recording(DS-7204/08HFHI-ST)
- Full channel@1280×720P resolution real-time recording(DS-7204/08HFHI-SL)
- HDMI and VGA output at up to 1920×1080P resolution
- Front panel and alarm I/O optional



DS-6701/04/08/16HF1/HWI(-SATA)

Full 4CIF/960H Encoder

- 1/4/8/16-ch video&audio input
- H.264/MPEG4/MPEG2/MJPEG & Dual-stream video encoding
- Full channel@4CIF resolution for DS-6700HF1 (-SATA) and full channel@WD1(PAL:960×576,NTSC:960×480) resolution for DS-6700HF1 (-SATA)
- Full channel@1280×720P resolution real-time recording for DS-6700HF1 (-SATA)
- Multiple network protocols
- One independent PoE network interfaces for DS-6701/6704HF1/HWI models
- Multiple PTZ protocols
- 1 SATA (DS-6701/02/04/08/16HF1/HWI-SATA)



DS-6601HFHI(-L)

HD1080P Encoder

- H.264 & Dual-stream video compression
- 1920×1080P resolution real-time recording
- HD-SDI/Fc/HDMI/VGA/YPbPr video input interfaces
- Multiple PTZ protocols
- SADP(IP Finder), UDP, RTP and RTSP protocols
- Video loop out optional(HD-SDI interface)



DS-6600HF1-JX

ATCA Standard Encoder

- Up to 64-ch video&audio input
- H.264/MPEG4/MPEG2/MJPEG & Dual-stream video encoding
- 16 slots available for audio/video output modules (DS-6604HF1-B)
- Each DS-6604HF1-B module provides 4-ch audio/video inputs
- Full channel@4CIF resolution real-time recording
- Standard rack-mounted chassis structure (8U 19")
- Pluggable modular design provides high flexibility

STANDALONE DVR



DS-9104/08/16HF1/HWI-ST(RT)

Full 4CIF/960H 2U DVR

- 4/8/16-ch video&audio input
- H.264 & Dual-stream video compression
- Full channel@4CIF real-time recording(HFI series)
- Full channel@WD1 resolution real-time recording(HWI series)
- HDMI and VGA output at up to 1920×1080P resolution
- Dual Gigabit network interfaces
- 8 SATA, 1 eSATA, 3 USB2.0
- *-RT series support RAID0, 1, 5, 10



DS-7304/08/16/24/32HF1/HWI-SH

Full 4CIF/960H 1.5U DVR


- 4/8/16/24/32-ch video&audio input
- H.264 & Dual-stream video compression
- Full channel@4CIF real-time recording(HFI series)
- Full channel@WD1 resolution real-time recording(HWI series)
- HDMI and VGA output at up to 1920×1080P resolution
- Gigabit network interfaces
- 4 SATA, 1 eSATA, 3 USB2.0



DS-7204/08/16HI-SL

Full CIF Entry-level 1U DVR

- 4/8/16-ch video&1-ch audio input
- H.264 and MPEG4 video stream supported
- Full channel@CIF real-time recording
- VGA output at up to 1920×1080P resolution
- HDD quota and group management
- 1 SATA, 2 USB2.0

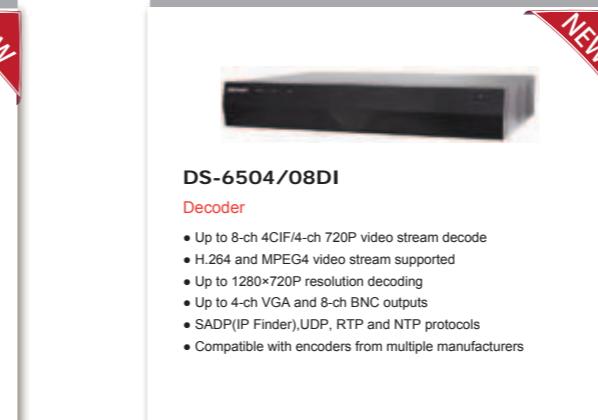

DS-6504/08DI

Decoder

- Up to 8-ch 4CIF/4-ch 720P video stream decode
- H.264 and MPEG4 video stream supported
- Up to 1280×720P resolution decoding
- Up to 4-ch VGA and 8-ch BNC outputs
- SADP(IP Finder), UDP, RTP and RTSP protocols
- Compatible with encoders from multiple manufacturers



DS-6401/04/08HDI-T

High Definition Decoder

- Up to 8-ch 5MP/16-ch 1080P/32-ch 720P/64-ch 4CIF video stream decode
- 8 slots available for audio/video output modules (DS-6408HDI-T-B)
- Each DS-6408HDI-T-B module provides 8-ch 5MP/16-ch 1080P/32-ch 720P/64-ch 4CIF video stream decode
- HDMI and DVI output at up to 1920×1080P resolution
- SADP(IP Finder), UDP, RTP and NTP protocols
- Video display on TV wall
- 32 users with multi-user level management



DS-6400HDI-JX

ATCA Standard decoder

- Up to 19