

DS-K1T805MBWX
Access Control Terminal



- High protective level: IP65 and IK08
- Slim and flexible design with metal
- 10,000 cards and 100,000 events storage
- Built-in card reader for M1 card
- Supports operation by mobile App (Hik-Connect)
- Supports AP configuration, configuration via PC web and mobile web are available
- Supports multiple authentication types: card, PIN, and bluetooth


▪ Specification

| System | |
|-------------------------------|--|
| Operating system | Linux |
| Audio | |
| Audio output | 1 built-in buzzer |
| Network | |
| Bluetooth | Support |
| Wired network | 10/100 Mbps self-adaptive |
| Wi-Fi | 2.4 GHz, IEEE802.11b, 802.11g, 802.11n, 802.11d, 802.11e, 802.11h, 802.11i |
| Interface | |
| RS-485 | 1, supports OSDP |
| Network interface | 1 |
| Wiegand | Wiegand 26/34 |
| Lock control | 1 |
| Exit button | 1 |
| Door contact input | 1 |
| Alarm input | 2 |
| Alarm output | 1 |
| TAMPER | 1 |
| Capacity | |
| Card capacity | 10,000 |
| Event capacity | 100,000 |
| Authentication | |
| Card type | M1 card |
| Card reading distance | 0 to 4 cm |
| Card reading duration | < 1 s |
| Function | |
| Hik-Connect | Support |
| Configuration via Web Browser | Support PC web configuration and mobile web operation |
| General | |
| Power supply | 12 VDC/1 A |
| Working temperature | -30 °C to 60 °C (-22 °F to 140 °F) |
| Working humidity | 0% to 90% (no condensing) |
| Dimensions | 57.7 mm × 177 mm × 34.6 mm (2.3" × 7.0" × 1.4") |
| Power consumption | ≤ 12 W |
| Language | English, Vietnamese, Brazilian Portuguese, Spanish, French, Italian, Arabic, Thai, Turkish, Indonesian, Ukrainian, and Russian |

▪ Available Model

DS-K1T805MBWX

▪ Dimension

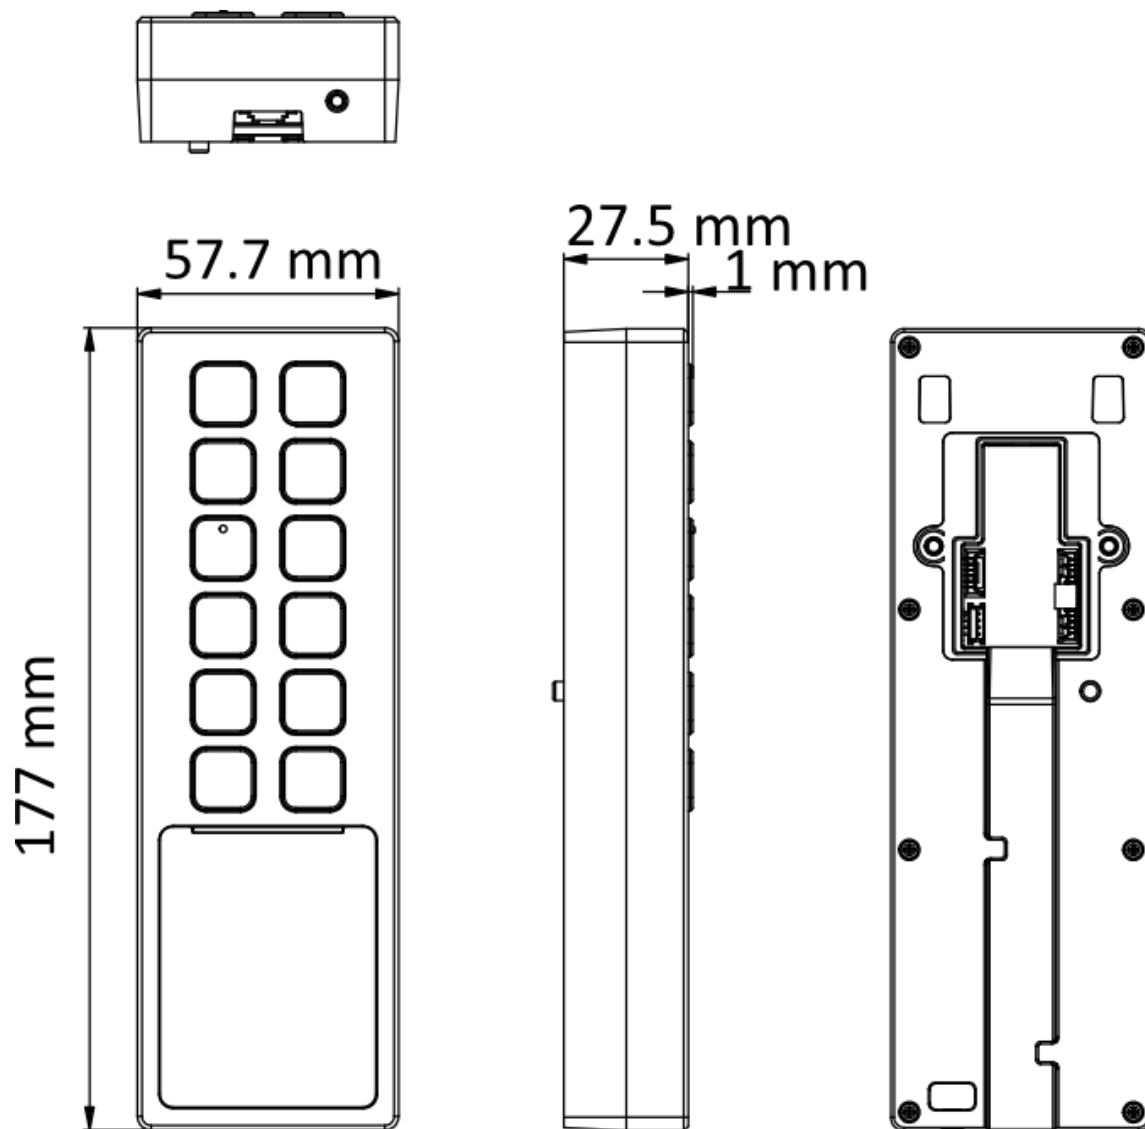

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

