

DS-K1109DKFB-QR Card Reader



- Supports RS-485 and Wiegand (W26, W34) protocol
- Supports reading Desfire card, Felica card and M1 card
- Supports authentication via card, password, fingerprint and QR code
- Supports bluetooth module
- Tamper-proof function


▪ Specification

Interface	
TAMPER	Support
RS-485	Support
Wiegand	Support
Authentication	
Fingerprint capacity	5000
Authentication	
Card reading distance	≤ 50 mm (≤ 1.97")
Card type	M1 card, DESfire card, Felica card
Card reading duration	< 1 s
Function	
Barcode recognition	Support Format: Code 128, Interleaved 2 of 5, Matrix 2 of 5, Code 39, Codebar, Code 9 and UCC/EAN-128
QR code recognition	Support
General	
Power supply	12 VDC
Working temperature	-40 °C to 65 °C (-40 °F to 149 °F)
Working humidity	0 to 90% (no condensing)
Dimensions	125 mm × 84.5 mm × 18 mm (4.92" × 3.33" × 0.71")
Protective level	IP65
Installation	Wall mounting
Buzzer	Support

▪ Available Model

DS-K1109DKFB-QR

▪ Dimension

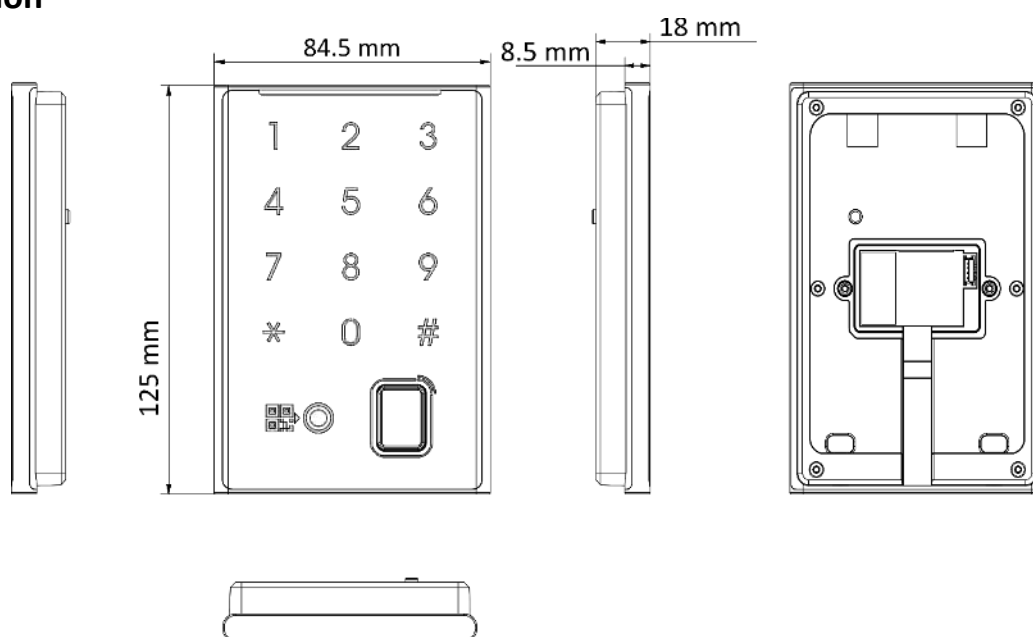

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq