

DS-K2M061 Secure Door Control Unit




DS-K2M061 Secure Door Control Unit is the interlayer between the access control terminal and the lock, including the door magnetic, the lock, the exit button and so on. It can be applied to keep the door closed when the door is damaged

- Communicates with the access control terminal via RS-485 to execute the commands from the terminal including open door, close door, normally open and normally closed
- Collects the door magnetic signal, the exit button signal and the tamper-proof signal and send them to the access control terminal
- Supports tampering alarm
- Supports RS-485 communication indicators to show the communication status
- 4-ch DIP switch supporting ID No. configuration
- Supports a Wiegand interface to connect a Wiegand card reader to enter/exist access control terminal by swiping card
- Fire interface and exit button linkage

▪ Specification

Interface	
Lock control	
Exit button	
Door contact input	
Alarm input	2
Alarm output	1
RS-485	1
Wiegand	
General	
Indicator	1 for power supply status
Power supply	12 VDC, 0.5 A
Working temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Working humidity	0% to 90% (relative humidity)
Dimensions	48 mm × 115 mm × 26 mm (1.9" × 4.5" × 1.0")
Installation	Wall Mounting
Weight	Gross weight: 0.28 kg (0.62 lb)
	Net weight: 0.20 kg (0.44 lb)

▪ Typical Application

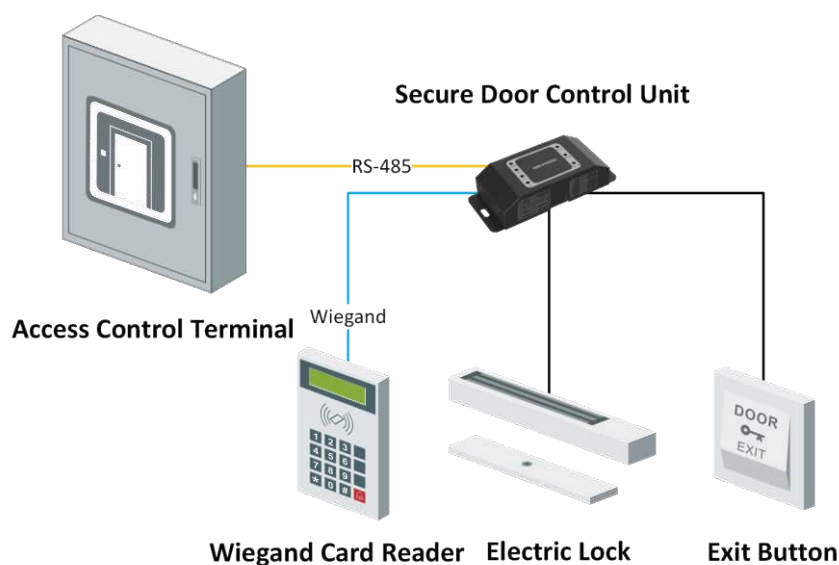

▪ Available Model

DS-K2M061

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global




Hikvision
Corporate Channel



hikvisionhq

▪ **Dimension**

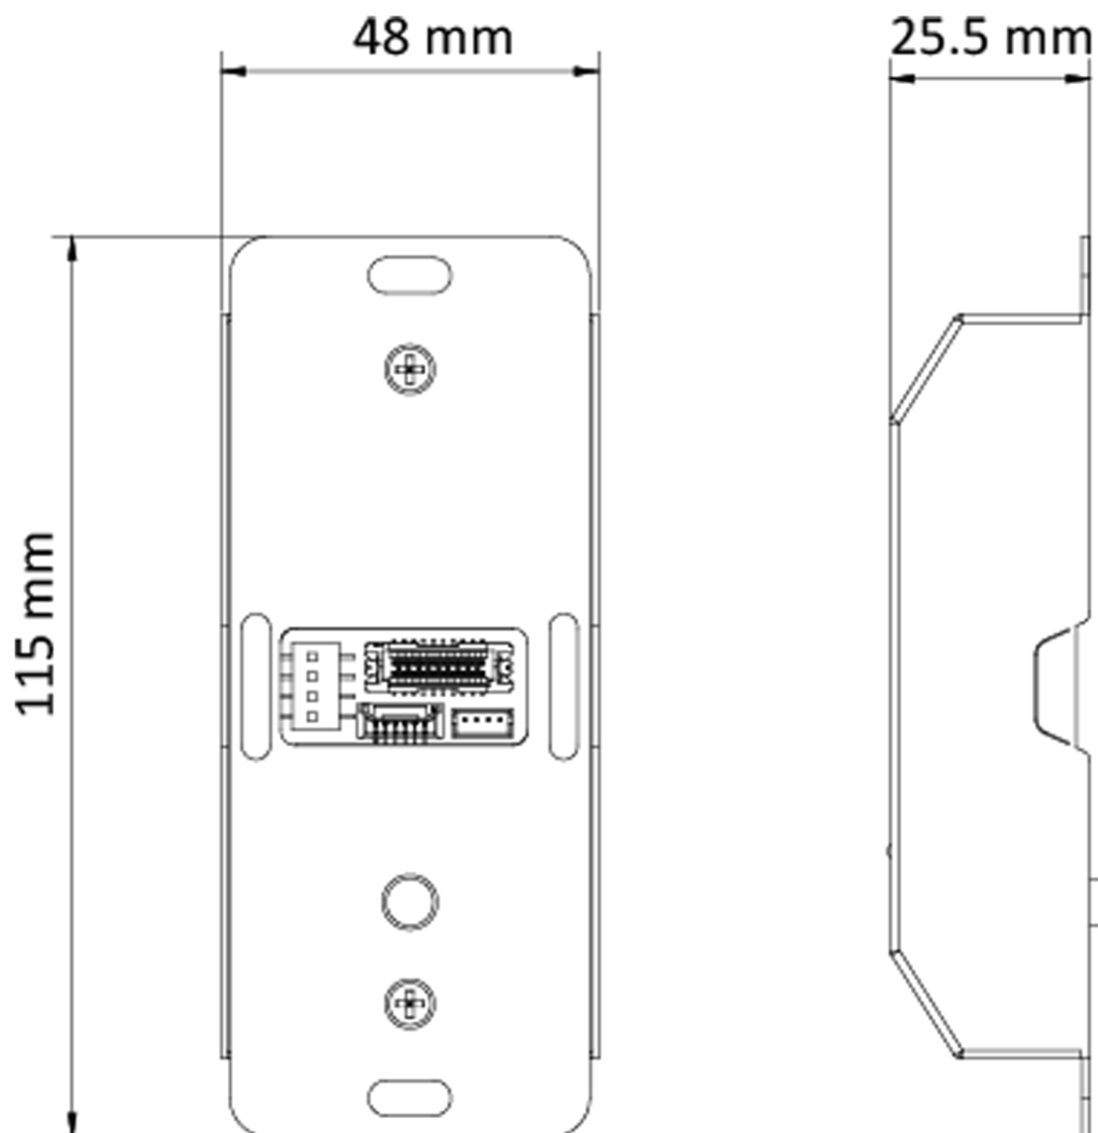

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

