

GV-FR Panel V2 Face Recognition Panel with Built-in NFC Reader and IPS

Touch Screen



GV-FR Panel V2



GV-FR Panel V2-QR

Key Features

- 7" IPS touch screen with 600 x 1024 HD display
- Face recognition distance of up to 2 m (6.6 ft)
- Built-in RGB & IR cameras
- 10,000 face image capacity
- 10,000 access card capacity
- 50,000 event log capacity
- Built-in 13.56 MHz for ISO 14443A reader
- Liveness detection (face spoofing detection)
- Masked face recognition
- Three access modes: Face Only mode, Card or Face mode, Card + Face mode
- QR code reading (optional)
- Integration with third-party Wiegand controllers
- Mobile app supported for push notifications
- 16 languages supported
- CE, FCC, LVD, RoHS compliant

INTRODUCTION

GV-FR Panel V2 is a face-recognition-based access reader with a 7" LCD touchscreen that displays 600 x 1024 HD images. When connected to GeoVision access control systems, GV-FR Panel V2 can grant or deny access using a number of credentials, including face recognition, access cards, and card plus face double authentication. Additionally, GV-FR Panel V2-QR can read QR codes from the GV-ASManager Visitor Management System (GV-VMWeb). A guest can gain entrance to a regulated area by scanning the QR code displayed on their mobile phone.

GV-FR Panel V2, with cutting-edge face recognition ability, can be integrated into any third-party Wiegand access control system. It combines AI video analytics with access control to provide a new level of convenience and security. Furthermore, its live view can be cast onto GV-VMS to build a more comprehensive surveillance management environment.

MODELS

GV-FR Panel V2	
GV-FR Panel V2 with Pillar Stand	with Pillar Stand
GV-FR Panel V2-QR	with QR Code Reader
GV-FR Panel V2-QR with Pillar Stand	with QR Code Reader and Pillar Stand

SPECIFICATIONS

Binocular Cameras	RGB Camera
Image Sensor	1/2.7" CMOS
Minimum Illumination	0.1 lux at F2.0
White Balance	Automatic
Frame Rate	20 FPS
Dynamic Range	85 dB

Touchscreen Panel		
Display	7" IPS LCD	
Resolution	600 x 1024	
Capacity		
Face Recognition Distance	2 m (6.6 ft)	
Recognition Angle	Vertical (FOV)	62°
	Horizontal (FOV)	78°
Card Supported	<ul style="list-style-type: none"> 13.56 MHz for ISO 14443A QR code reading (Optional) 	
Capacity	Face Image	10,000
	Card	10,000
	Event Log	50,000
Operation Mode	Face Only mode, Card or Face mode, Card + Face mode	
Firmware Upgrade	via GV-IP Device Utility	
Installation Management	Web-based configuration	
Face Recognition		
Recognized Face Angle	Tilt (Down / Up)	-35° ~ 35°
	Swing (Left / Right)	-35° ~ 35°
Network		
Interface	10/100 Ethernet	
Mechanical		
Audio	Built-in speaker and microphone	
Internal Storage	16 GB eMMC	
Connector	Power	DC jack
	Ethernet	RJ-45
	Wiegand Output	Wiegand 26 / 34 bits, distance 100 m (328.1 ft) via GV-AS1620 / 2120 / 4110 / 4111 / 8110 / 8111
	Wiegand Input	Not functional
	Relay Output	DC 30V, 1A
	USB	2.0
General		
	GV-FR Panel V2 / V2-QR	GV-FR Panel V2 with Pillar Stand / V2-QR with Pillar Stand
Language	Bulgarian, Chinese Simplified, Chinese Traditional, Czech, English, French, German, Indonesian, Italian, Japanese, Portuguese, Russian, Slovak, Spanish, Thai, Ukrainian	
Operating Temperature	-10°C ~ 50°C (14°F ~ 122°F)	
Humidity	10% ~ 90% (non-condensing)	
Power	DC 12V, 3A	
Max. Power Consumption	5 W	
Dimensions (H x W x D)	261 x 124 x 21.3 mm (10.28 x 4.88 x 0.84 in)	377 x 124 x 86 mm (14.84 x 4.88 x 3.39 in)
Weight	0.92 kg (2.03 lb)	1.35 kg (2.98 lb)
Pillar Stand Tilt Angle	N/A	45°
Certification	CE, FCC, LVD, RoHS	

Note:

- Connecting the reader to a third-party controller could limit the maximum Wiegand connection distance to 30 m (98.43 ft).
- All specifications are subject to change without notice.

FIRMWARE AND SOFTWARE COMPATIBILITY

GV-FR Panel V2 is compatible with the following firmware and software versions:

Supported Product / Application	Version	
Controller	GV-AS210 / 2110 / 2120	V2.60 or later
	GV-AS410 / 4110 / 4111	
	GV-AS810 / 8110 / 8111	
	GV-AS1620	V1.13 or later
	GV-CS1320	V3.13 or later
	GV-EV48	V2.31 or later
GV-FWC access data converter	V1.02 or later	
GV-ASManager access control software	V6.1.0 or later	
GV-VMS	V17.4.8 / V18.3.5 or later	
Face Enrollment	GV-ASManager (software) V6.1.0 or later GV-Face Manager (utility) V1.3.0 or later GV-Face (mobile app) for Android V2.2.0 or later / for iOS V2.2.1 or later	
Firmware Upgrade	GV-IP Device Utility V9.0.2 or later	

PACKING LIST


- GV-FR Panel V2
- Wall Mount Bracket Kit
- Screw Kit
- Power Adapter DC 12V 3A

OPTIONS

GV-AS ID Card, Key Fob, Sticker	13.56 MHz cards / key fobs are available.
GV-FWC	GV-FWC integrates GeoVision face-recognition-based cameras, software, and readers into access control systems by sending access card data, paired to Face IDs, to controllers either through TCP/IP or Wiegand.

DIMENSIONS

GV-FR Panel V2 / V2-QR:

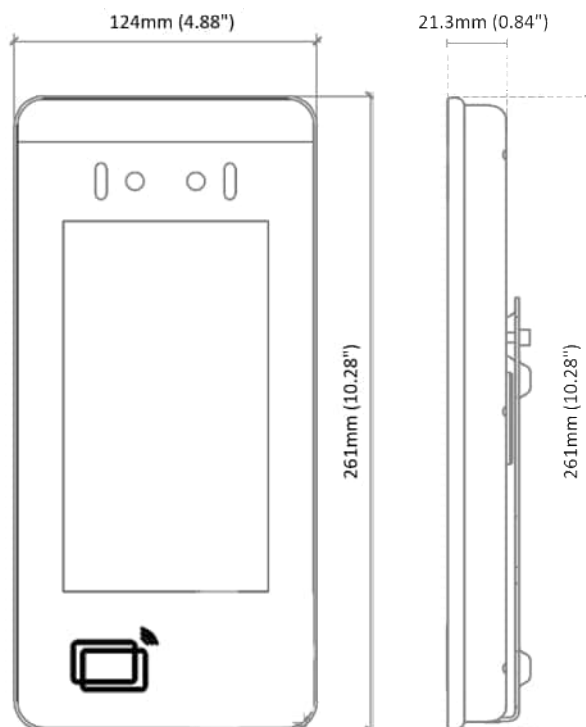

GV-FR Panel V2 with Pillar Stand / V2-QR with Pillar Stand:

