

Omada EAP | Datasheet

EAP211-Bridge KIT



5GHz 867Mbps Indoor/Outdoor Wireless Bridge



Highlights

- Up to 0.62 mi (1 km) Transmission Distance.*
- Equipped with Omada SmartBridging: Our unique design for the most effortless and easy bridge setup ever.
- Plug-and-Play with Preconfigured Kit: Preconfigured for instant auto-pairing, the bridges deliver instant connectivity right out of the box. Simply power on and go-ideal for quick deployments.
- Unique Design for Instant Multi-Bridge Auto-Pairing: Effortlessly connect multiple bridges with PtMP Auto-Pairing. Just turn the switch and press the pair button. No login or setup needed.*
- App-Guided Alignment: Visualized app-guided alignment for long-distance setups and instant speed testing for installation verification.
- Flexible Power Supply: 802.3af PoE (1,2pins; 3,6pins), 24V Passive PoE (+4,5pins; -7,8pins), and 12V DC (compatible with TP-Link solar power supply system).
- 3× Gigabit Ethernet Ports: Connects more cameras and devices without an extra switch.*
- Ideal for Outdoor Scenarios: IP65 weatherproof enclosure and operating range of -40 °C to +70 °C.*
- Remote Monitoring & Management: Standalone mode or Omada SDN mode for remote centralized management via Web UI or App.

Product Pictures

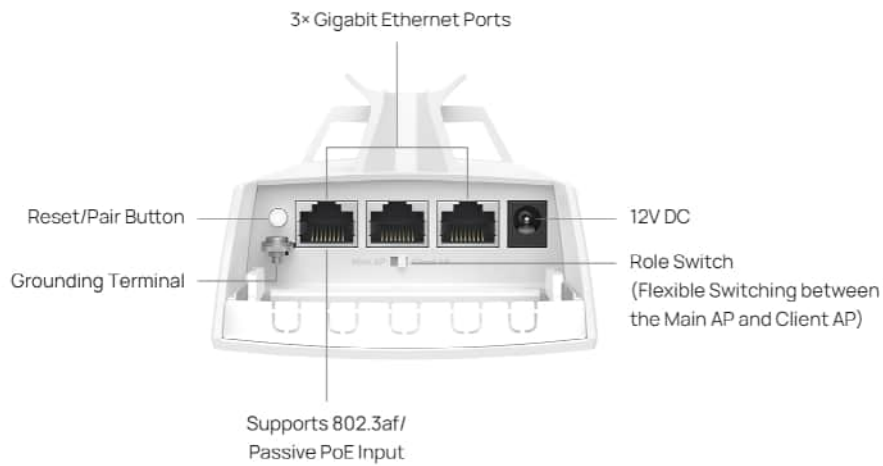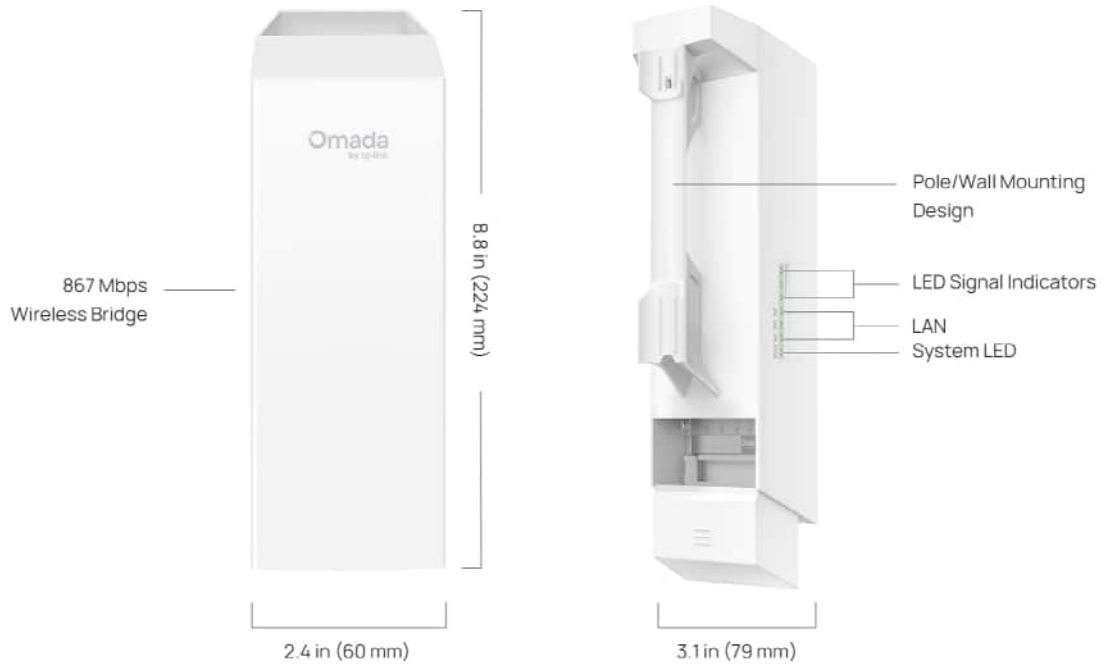


Notes:

1. Pairing with the Pair button requires firmware upgrade.
2. Wall mounting accessories sold separately.

Omada Solution

Omada's Software Defined Networking (SDN) platform integrates network devices, including access points, switches, and gateways, providing 100% centralized cloud management. Omada creates a highly scalable network—all controlled from a single interface.

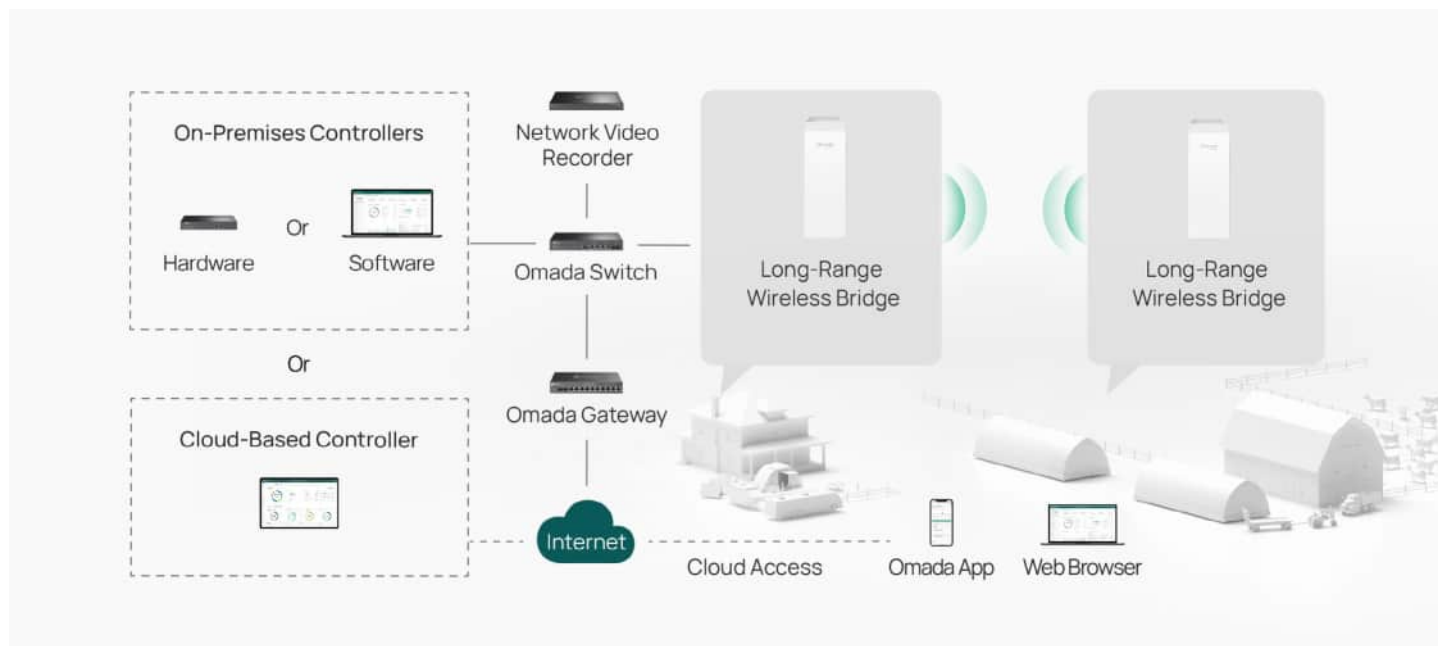


Specifications

Model		EAP211-Bridge
Name		5GHz 867Mbps Indoor/Outdoor Wireless Bridge
Main Design	LAN Interfaces	3x Gigabit Ethernet Port
	DIP Switch	Role Switch
	Wi-Fi Standards	IEEE 802.11a/n/ac
	Maximum Data Rate	867 Mbps (5 GHz)
	Wireless Client Capacity	8
	Bluetooth	-
	Antennas	Internal 2x2 Dual-polarized directional MIMO antenna 5 GHz: 10.0 dBi Horizontal Beamwidth: 60°
Transmit Power	CE:	<23dBm (5 GHz, band 1/2, EIRP) <30dBm (5 GHz band3, EIRP)
	FCC:	<23dBm (5 GHz band1) <25dBm (5 GHz band4)
Reception Sensitivity	5GHz: 11ac VHT20 MCS0:-94dBm; 11ac VHT20 MCS8:-71 dBm; 11ac VHT40 MCS0:-90.5dBm; 11ac VHT40 MCS9:-66.5dBm; 11ac VHT80 MCS0:-87.5dBm; 11ac VHT80 MCS8:-63dBm	
Centralized Management	Omada Software Controller	√
	Omada Hardware Controller	√
	Omada APP	√
Security	Captive Portal Authentication	-
	Access Control	-
	Maximum number of MAC Filter	4000
	Wireless Isolation between Clients	-
	VLAN	√
	Rogue AP Detection	√
	Wireless Encryption	√
802.1X Support	-	

Model		EAP211-Bridge
Wireless Function	Multiple SSIDs	8
	Channel	US: 5G: 36,40,44,48,149,153,157,161,165 EU: 5G: 36,40,44,48,52,56,60,64,100,104,108,112,116,120,124,128,132,136,140
	Enable/Disable Wireless Radio	√
	Enable/Disable SSID Broadcast	√
	Guest Network	√
	Automatic Channel Assignment	-
	Transmit Power Control	Adjust transmit Power on dBm
	QoS (WMM)	-
	Seamless Roaming	-
	Mesh	√
	Beamforming	√
	MU-MIMO	5G 2×2 MU-MIMO DL
	MIMO	2×2 5G MIMO
	OFDMA	-
	Rate Limit	√
	Load Balance	-
	Airtime Fairness	-
	Band Steering	-
	RADIUS Accounting	√
	MAC Authentication	-
Reboot Schedule	√	
Wireless Schedule	√	
Wireless Statistics	√	
Static IP/Dynamic IP	√	
Support Data Rates	802.11ac	6.5 Mbps to 867 Mbps (MCS0-MCS9, NSS = 1 to 2 VHT20/40/80)
	802.11n	6.5 Mbps to 300 Mbps (MCS0-MCS15, HT20/40)
	802.11a	6, 9, 12, 18, 24, 36, 48, 54 Mbps
Management	LED ON/OFF Control	√
	Management MAC Access Control	-
	Web-based Management	√
	SNMP	√
	SSH	√
	Restore & Backup	√
	Firmware update via Web	√
	NTP	√
	System Log	√
	Email Alerts	√
Physical & Environment	Power Supply	12V DC 802.3af PoE (1,2pins; 3,6pins) 24V Passive PoE (+4,5pins; -7,8pins)
	Maximum Power Consumption	11.5W
	Reset	√
	Mounting	Pole mounting (Accessories included) Wall mounting (Accessories sold separately)

Model		EAP211-Bridge
Others	Certifications	CE, FCC, RoHS
	Dimensions (W x D x H)	3.1 × 2.4 × 8.8 in (79 × 60 × 224 mm)
	Net Weight	280.9g
	Enclosure Material / Rack Material	Enclosure: ASA-HB Pole Mounting Straps: Nylon 66
	Lightning Protection	Air discharge: ±8kV Contact discharge: ±4kV Common mode 10/700: ±6kV
	Environment	Operating Temperature: -40 °C–70 °C (-40 °F–158 °F); Storage Temperature: -40 °C–70 °C (-40 °F–158 °F); Operating Humidity: 10%–90% non-condensing; Storage Humidity: 5%–90% non-condensing

Antenna Radiation Patterns

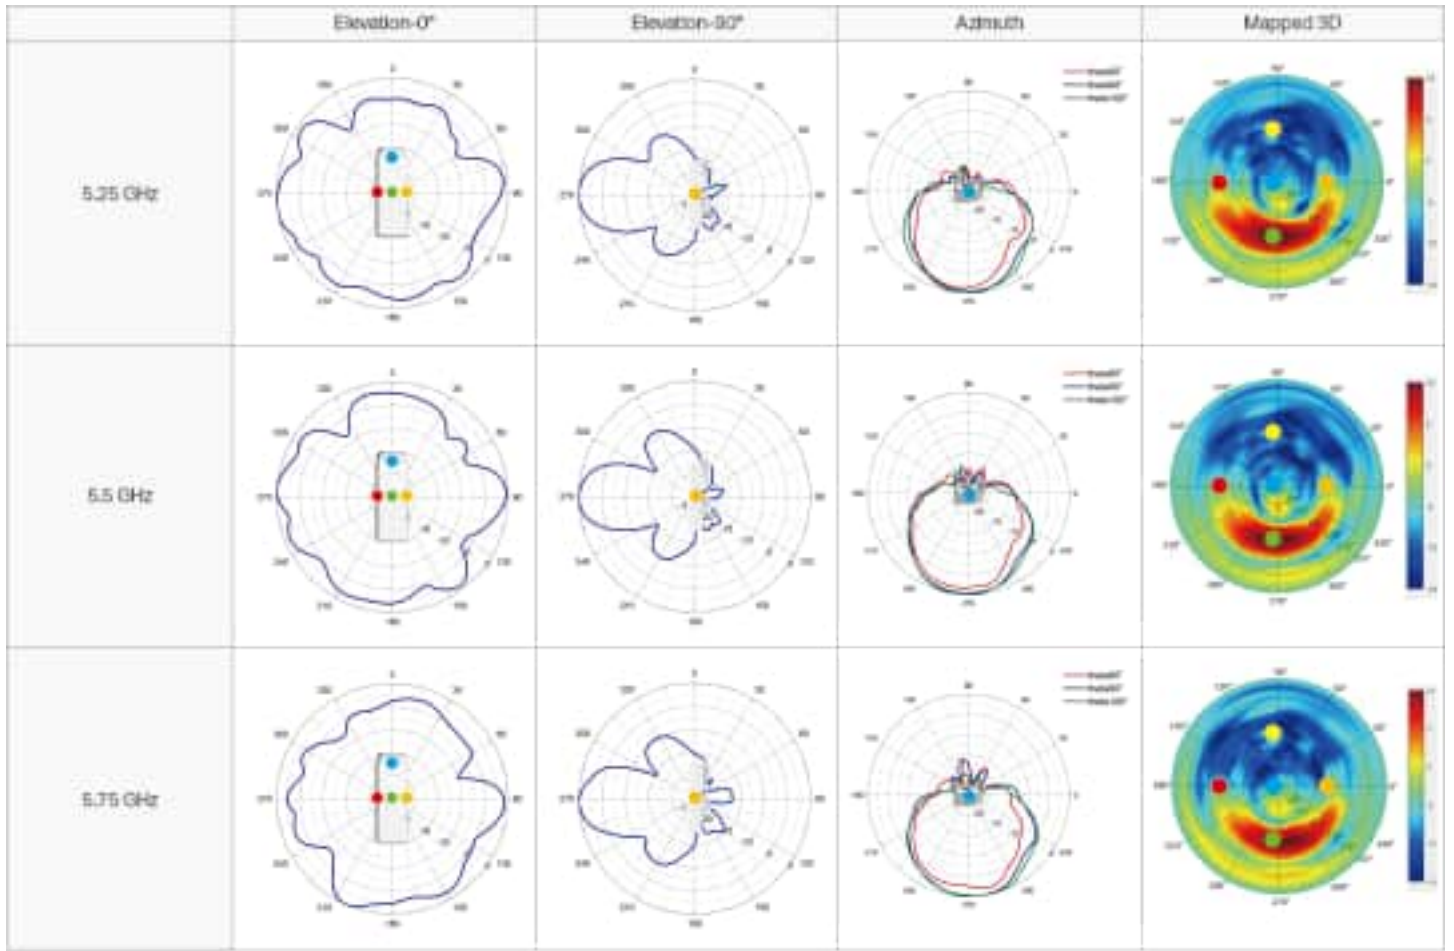

Disclaimers

- * Pairing with the Pair button requires firmware upgrade.
- * Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage are not guaranteed and will vary as a result of 1) environmental factors, including building materials, physical objects, and obstacles, 2) network conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead, and 3) client limitations, including rated performance, location, connection, quality, and client condition.
- * The advertised coverage is calculated based on laboratory testing. Actual coverage is not guaranteed and will vary as a result of the performance of the equipped antennas, client limitations, and environmental factors.
- * Protection against lightning and electro-static discharge may be achieved through proper product setup, grounding, and cable shielding. Refer to the instruction manual and consult an IT professional to assist with setting up this product.
- * Non-Omada devices connected to the wired LAN ports will not be recognized by the Omada controllers, preventing users from viewing their connection status. To address this issue, connect those non-Omada devices to an Omada switch that links to the bridge's wired LAN ports.
- * PoE budget calculations are based on laboratory testing. Actual PoE power budget is not guaranteed and will vary as a result of client limitations and environmental factors.