

DS-6704HUHI
4-ch 5 MP H.265 DVS




- Up to 4 analog cameras can be connected
- Efficient H.265+ compression technology
- Encoding ability up to 5 MP @ 12 fps
- 4 signals input adaptively (HDTVI/AHD/CVI/CVBS)
- Supports Micro SD card, up to 128 GB capacity

▪ Specification

Video and Audio	
Analog Video Input	4-ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
HDTVI Input	5MP, 4MP, 3MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25
AHD Input	1080p25, 1080p30, 720p25, 720p30
HDCVI Input	1080p25, 1080p30, 720p25, 720p30
CVBS Input	PAL/NTSC
Audio Input	1-ch, green-pin interfaces (2.0 Vp-p, 1 KΩ)
Audio Output	1-ch, 3.5mm interface (Linear, 1 KΩ)
Two-Way Audio	1-ch, 3.5mm interface (2.0 Vp-p, 1 KΩ)
Synchronous Playback	4-ch
Recording	
Video Compression	MJPEG (sub-stream)/H.265+/H.265/H.264+/H.264
Encoding Resolution	5 MP/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF
Frame Rate	Main stream: 5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N)
Video Bitrate	32 Kbps to 10 Mbps
Dual-stream	Support
Audio Compression	G.711u
Audio Bitrate	64 Kbps
Network	
Network Protocol	TCP/IP, PPPoE, DHCP, DNS, DDNS, NTP, SADP, SMTP, NFS, UPnP™, HTTPS, ONVIF profile S
Network Interface	1, RJ45 10M/100M self-adaptive Ethernet interface
Auxiliary Interface	
SD Card	1 Micro SD card slot, support Micro SD card
Capacity	8G Up to 128 GB
Serial Interface	RS-485 (half-duplex); RS-232
Alarm In/Out	4/2
General	
Power Supply	12 VDC, 1.25 A
Consumption	≤ 15W
Working Temperature	-10 °C to +55 °C (+144 °F to +131 °F)
Working Humidity	10% to 90%
Dimension (W × D × H)	114 × 165 × 48 mm (4.5 × 6.5 × 1.9 inch)
Weight	≤ 1.5 kg (3.3 lb)

▪ Dimension

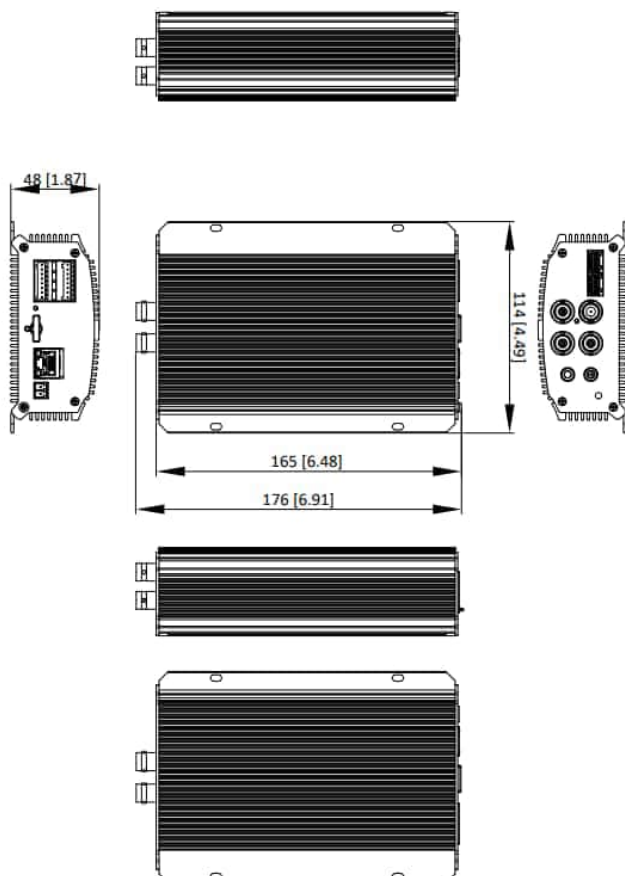

Unit:mm [inch]

SCALE 1:1

See Far, Go Further



www.hikvision.com
support@hikvision.com

