


DS-2CD2522F-I(S) (2.0MP)

DS-2CD2532F-I(S) (3.0MP)


IR Mini Dome Network Camera

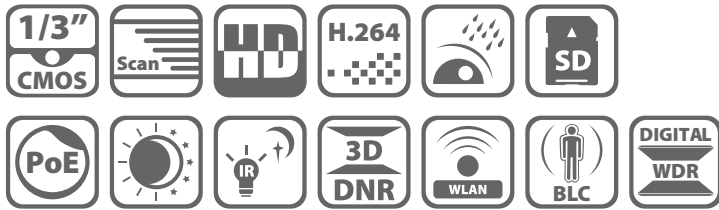

Key features

- 2MP / 3MP high resolution
- HD real-time video
- IR LEDs (up to 10m)
- DWDR & 3D DNR & BLC
- Onboard storage (up to 64GB)
- ~~S~~: Audio/Alarm I/O
- IP66 protection
- ~~B~~uilt-in Mic

Dimensions

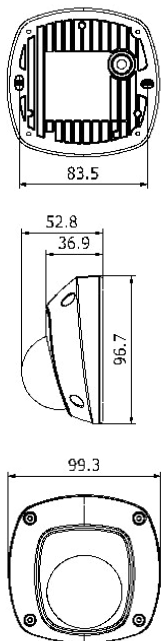

Unit: mm

Available models

~~DS-2CD2522F-I~~, ~~DS-2CD2522F-IS~~

DS-2CD2532F-I, ~~DS-2CD2532F-IS~~

* 1.3MP model is also available -- DS-2CD2512F-I(S)

* ~~S~~: Audio/Alarm I/O



	DS-2CD2522F-I (S)		DS-2CD2532F-I (S)
Camera			
Image sensor	1/3" progressive scan CMOS		
Min. illumination	0.01 lux @F1.2, AGC ON, 0 lux with IR		0.07 lux @F1.2, AGC ON, 0 lux with IR
Shutter time	1/3s ~ 1/100,100s		Angle of view : 60°
Lens	4mm @ F2.0 (2.8mm, 6mm optional) Angle of view:- 98.5°(2.8mm), 79°(4mm), 49°(6mm)		4mm @ F2.0 (2.8mm, 6mm optional) 2048 x 1536: Angle of view:- 86°(2.8mm), 70°(4mm), 43.3°(6mm) 1920 x 1080: Angle of view:- 98.5°(2.8mm), 79°(4mm), 49°(6mm)
Lens mount	M12		
Day & night	ICR		
Adjustment angle	Horizontal: ±30°, vertical: 0~75°, rotation: 0~360°		
Digital noise reduction	3D DNR		
Wide dynamic range	Digital WDR		
Backlight compensation	Yes, zone configurable		
Compression Standard			
Video compression	H.264 / MJPEG		
H.264 codec profile	Main profile		
Bit rate	32 Kbps ~ 16 Mbps		
Audio compression (-S)	G.711 / G.726 / MP2L2		
Audio bit rate (-S)	64 Kbps (G.711) / 16 Kbps (G.726) / 32~128Kbps (MP2L2)		
Image			
Max. Image Resolution	1920 x 1080		2048 x 1536
Frame rate	50Hz: 25fps (1920 x 1080), 25fps (1280 x 720) 60Hz: 30fps (1920 x 1080), 30fps (1280 x 720)		50Hz: 20fps (2048 x 1536), 25fps (1920 x 1080), 25fps (1280 x 720) 60Hz: 20fps (2048 x 1536), 30fps (1920 x 1080), 30fps (1280 x 720)
Image settings	Saturation, brightness, sharpness, contrast, sharpness adjustable through client software or web browser		
Network			
Network storage	NAS		
Alarm trigger	Motion detection, line crossing detection, tampering alarm, scene change detection, face detection, intrusion detection		
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour		
System compatibility	ONVIF, PSIA, CGI		
General functionalities	Flickerless, dual stream, heartbeat, mirror, user authentication, video mask, watermark		
Interface			
Communication interface	1 RJ45 10M / 100M ethernet port		
On-board storage	Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB		
Alarm interface	S: 1/1 alarm I/O		
General			
Operating conditions	-30 °C ~ 60 °C (-22°F ~ 140 °F) humidity 95% or less (non-condensing)		
Power supply	12 VDC ± 10% , PoE (802.3af)		
Power consumption	Max. 5W		
Ingress protection level	IP66		
Impact Protection	IEC60068-275Eh, 50J; EN50102, up to IK08		
IR range	Up to 10m		
Dimensions (mm)	99.3x96.7x52.8mm		
Weight	600 g		