


DS-1272ZJ-110

Wall Mounting Bracket for Dome Camera

Features:

- Aluminum alloy material with surface spray treatment
- Exquisite cable entrance design
- Waterproof rubber blanket for outdoor application
- Convenient installation coordinating with adaptor

Dimension:

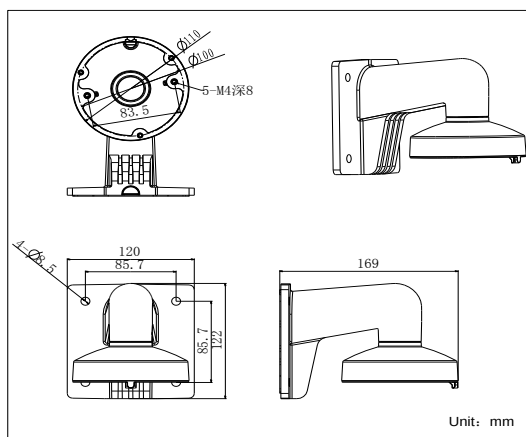

Order Model:

DS-1272ZJ-110

**Parameter:**

Model Parameters	DS-1272ZJ-110
	Wall Mounting Bracket for Dome Camera
Appearance	Hik White
Range of Application	Dome camera wall mounting
Material	Aluminum Alloy
Dimension	120×122×169mm
Weight	420g

Notice:


- The bracket should be installed on flat wall
- The wall must be capable of supporting over 3 times as much as the total weight of the camera and the mount.
- The maximum load capacity of the bracket is 4.5KG

Model Suitable:


DS-2CC51D3S-VPIR, DS-2CC52D5S-VPIR, DS-2CD2112(D)-(I)、
DS-2CD2132(D)-(I)

Installation Step:

- ① Choose appropriate wall to install the bracket and thread the cable
- ② Fix adaptor to bracket and thread the cable





A: Cable entry hole




B: Fastening screw


- ⑤ Complete wiring and fix dome module to cap
- ⑥ Fix the dome module and adjust the angle of view



- ③ Screw up and complete the fixation of adaptor
- ④ Take off lower dome, inner module and lining



- ⑦ Install lining and lower dome to dome module and screw up
- ⑧ Installation complete



Note: The actual bracket may vary from the picture above.