


## GV-VS2400 4CH H.264 TVI 1080p Video Server



- H.264
- 4-channel TVI 1080p / 720p and analog 960H / D1 real-time video
- 12V DC
- Tampering Alarm
- USB HDD Storage
- UMTS / 3G / 3.5G / 4G
- Automatic switch between WiFi and 3G
- Supports over 50 PTZ models
- 29 languages on Web interface
- HD-TVI (1.0 / 2.0 standard)
- ONVIF (Profile S) conformant

GV-VS2400 is a powerful H.264 Video Server with compact size and supports 4-channel TVI 1080p / 720p and analog 960H / D1 real-time video. It can be fully integrated with GV-DVR / NVR / VMS to form a powerful IP surveillance solution. GV-VS2400 converts analog signals into high-resolution digitized images up to 2 megapixels and supports over 50 PTZ models to fulfill various project demands. It can record videos to a local USB storage, performing as a compact video recorder. It is also able to trigger Tampering Alarm alerts when cameras are tampered with, which can prevent criminal activities.

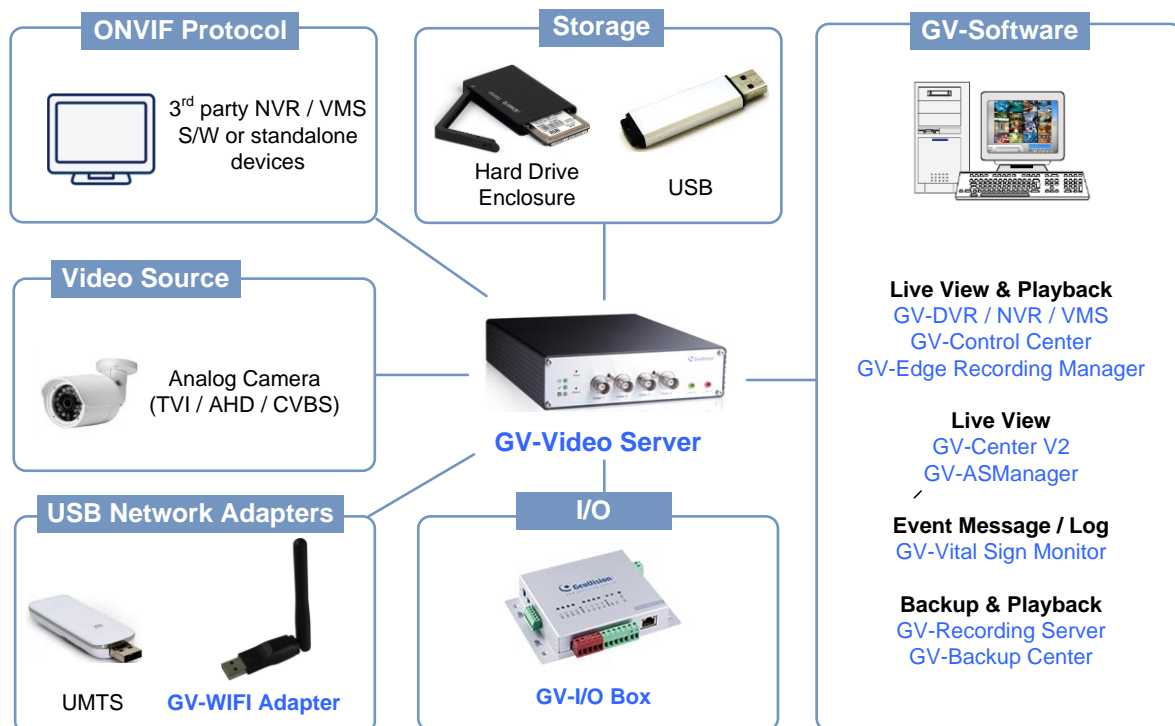

## Specifications

Video			
Video Standard		NTSC, PAL	
Video Input		4 channels	
Compression		H.264	
Signal Type		TVI / CVBS	
Frame Rate	NTSC	30 fps per channel; 120 fps in total for 4 channels	
	PAL	25 fps per channel; 100 fps in total for 4 channels	
Resolution	NTSC HD	Main Stream	1920 x 1080 (Default), 1280 x 720, 640 x 360, 448 x 252 for TVI Signal
		Sub Stream	640 x 360, 448 x 252 (Default) for TVI Signal
	NTSC SD	Main Stream	960 x 480, 720 x 480 (Default), 480 x 240, 360 x 240 for Analog Signal
		Sub Stream	480 x 240, 360 x 240 (Default) for Analog Signal
	PAL HD	Main Stream	1920 x 1080 (Default), 1280 x 720, 640 x 360, 448 x 252 for TVI Signal
		Sub Stream	640 x 360, 448 x 252 (Default) for TVI Signal
	PAL SD	Main Stream	960 x 576, 720 x 576 (Default), 480 x 288, 360 x 288 for Analog Signal
		Sub Stream	480 x 288, 360 x 288 (Default) for Analog Signal
Video Streaming		Configurable frame rate and bandwidth, Constant and variable bitrate	
Video Adjustment		Brightness, Contrast, Saturation, Hue, Sharpness	
Dual Streams		Yes	
Coaxial Cable	Recommended Type		5C-FB or above
	Maximum Length		300 m (984 ft)
Audio			
Audio Input		1 channel	
Compression		G.711	
Audio Support		Two-way	
Management			
Event Management	Trigger	Schedule, Sensor Input, Motion Detection	
	Action	<ul style="list-style-type: none"><li>● Store Video (AVI format)</li><li>● Send e-mails with captured images</li><li>● Upload captured images to FTP Server</li><li>● Monitor through Center V2 and Vital Sign Monitor</li><li>● Activate relay outputs to control external devices</li></ul>	
Firmware Upgrade		Remote upgrade by HTTP, Firmware upgrade utility	
Storage		USB HDD Storage	
Client PC Requirements		Microsoft Internet Explorer 8.x or later	
Security		IP address filtering	
Language		Bulgarian / Czech / Danish / Dutch / English / French / German / Greek / Hebrew / Hindi / Hungarian / Italian / Indonesian / Japanese / Norwegian / Lithuanian / Persian / Polish / Portuguese / Romanian / Russian / Serbian / Simplified Chinese / Slovakian / Slovenian / Spanish / Thai / Traditional Chinese / Turkish	
Max Number of Live Streams		16	
Max Numbers of RTSP Streams		25	
Network			
Interface		10/100/1000 Base-T Ethernet, 802.11b/g/n Wireless LAN (optional), Mobile broadband: UMTS, EDGE, etc. (optional)	
Protocol		DHCP, DynDNS, FTP, HTTP, HTTPS, 3GPP/ISMA, NTP, ONVIF (Profile S), QoS (DSCP), RTSP, SMTP, SNMP, TCP, UDP, UPnP	

Security Feature		-No default ID and Password -802.1x authentication -HTTPS with SSL certificate stored within the video server
<b>External Interface</b>		
Video Input		4 BNC ports
Audio Input		1 port stereo phone jack, 3.5 mm/0.14"
Audio Output		1 port stereo phone jack, 3.5 mm/0.14"
Sensor Input		4 inputs
Alarm Output		4 outputs
PTZ		RS-485 +/-
Ethernet		RJ-45, 10/100/1000 Mbps
USB		2 ports (USB 2.0)
Power	Input	DC Jack (DC 12V, 3.0A)
	Output	12V, 1.6A, (19.2 W Max.)
<b>Environment</b>		
Operation Temp.		-20°C ~ 50°C / -4°F ~ 122°F
Humidity		0% ~ 85% RH (non-condensing)
Weather Resistance		Indoor use

**Note:**


1. GV-Video Server cannot work with microphones that acquire power from the unit. Use microphones that have external power supply.
2. GV-VS2400 supports 1 external hard disk (2.5" or 3.5") with up to 14 TB capacities.
3. It is not recommended to use the flash USB drive with GV-VS2400 because of its slow read and write speed.
4. When transmitting video signals over a long distance, it is highly recommended to use 5C-FB coaxial cables or above to minimize the degradation of image quality. The transmission distance should be within 300 m (984 ft).
5. Product design and specifications are subject to change without notice.

## Packing List

1. GV-VS2400
2. AC Power Cord
3. Power Adaptor
4. Download Guide
5. Warranty Card

## Options

Optional devices can expand your GV-Video Server's capabilities and versatility. Contact our dealer for more information.

DC Male-to-Male Cable	DC Male-to-Male Cable and DC 1-Male to 4-Female Cable are both used to power the cameras through the GV-Video Server. For instance, you can purchase four DC Male-to-Male Cables and one DC 1-Male to 4-Female Cable to power four cameras through the GV-Video Server.
DC 1-Male to 4-Female Cable	
GV-Relay V2	Working with a GV-Relay V2, the GV-Video Server is capable of driving the loads of relay outputs over 5 volts.
GV-WiFi Adaptor V2	GV-WiFi Adaptor V2 is designed to connect GV IP devices, such as GV-Video Server, to the wireless network.

DC 1-Male to 4-Female Cable      DC Male-to-Male Cable

Wall Hook	<p>Wall Hook is used to mount GV-VS2400 to the wall.</p> 
DIN-rail Hook	<p>DIN-rail Hook is used to mount GV-VS2400 to a 35-mm (1.38-in) DIN rail.</p> 
Rack Mount	<p>Rack Mount is used to mount up to 3 video servers to a 19-in (482.6-mm) rack.</p> 

### Supported Wireless LAN USB Adaptor

Vendors	Model
D-Link	DWA-140 (H/W version B1), DWL-G122 (version C1)
EDIMAX	EW-7318Ug, EW-7718Un, EW-7711UAn
Linksys	WUSB54GC, WUSB600 (version 1)
Pegatron	WL-166N11
<b>Note:</b> Linksys WUSB54GC ver. 3 is not supported.	

### Supported Mobile Broadband Device

Vendors	Model
Bandluxe	C320, C501
D-Link	DWM-222
HUAWEI	E156, E156B, E169, E220, E1692, E1750, E1752, E1756, E1756C, EC169C, EC189 USB Modem (HSDPA/UMTS/EDGE/GPRS/GSM)
Novatel	MC950D, MC996D, MC998D (HSDPA/UMTS/EDGE/GPRS/GSM)
Onda	MSA523HS
Sierra	250U
Verizon	USB727, USB728, USB760 Modem (EVDO)
Vodafone	K3565 (Rev 2)
ZTE	MF100