

DS-KD8003-IME1/Flush Video Intercom Module Door Station


HIKVISION



Key Feature

- Modular door station for villa
- DS-KD8003 with its flush mouting accessories
- IP65 (DS-KD8003+DS-KD-ACF1/Plastic)
- 2 MP HD video intercom function
- Supports sub-modules access
- Easy to and extend

Typical Application

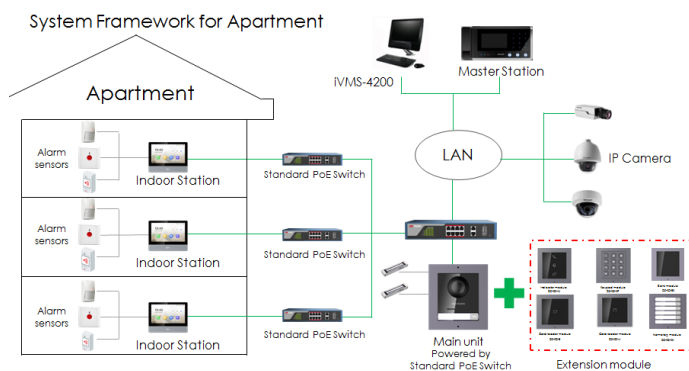

Operation method	/
Type	/
Resolution	/
Video parameters	
Supplement light	IR supplement
Video compression standard	H.264
Lens	1
FOV	Horizontal: 180° Vertical: 96°
WDR	Support
Pixel	Main stream : 1920 × 1080 Sub stream : 720 × 480
Audio parameters	
Audio input	Built-in omnidirectional microphone
Audio compression standard	G.711 U
Audio output	Built-in loudspeaker (More than 85 dB within 20 cm)
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable

Specification

System parameters	
Operation system	Embedded Linux operation system
Flash	16MB
RAM	256MB
CPU	Embedded MCU Processor
Display parameters	
Size	/


Capacity	
Fingerprint capacity	/
User capacity	2000
Face capacity	/
Linked indoor station	100
Event capacity	/
Network parameters	
Communication protocol	TCP/IP, RSTP
Wired network	10/100 Mbps self-adaptive Ethernet
Wi-Fi	/
Bluetooth	/
3G/4G	/
Device interfaces	
Alarm input	4
TAMPER	1
Network interface	1
Exit button	2
RS-485	1
USB	0
Wiegand	0
TF card	0
Alarm output	0
Lock control	2
Door contact input	2
Power interface	1
General	
Button	1
Installation	Flush mounting
Indicator	0
Weight	Without package: 345 g With package: 840 g
Protective level	IP65
Power supply method	12 VDC/PoE (IEEE 802.3af)
Working temperature	-40° C to +55° C (-40° F to 131° F)
Working humidity	10% to 95%

Dimensions	Door station: 98 mm × 99.8 mm × 43.9 mm (3.86" × 3.93" × 1.73")
	Cover: 134 × 124 × 4 mm (5.28" × 4.88" × 0.16")
	Gang box: 134 × 135 × 56 mm (5.28" × 5.31" × 2.20")
Battery	/
Application environment	Outdoor
Power consumption	≤ 10 W

Available Model


DS-KD8003-IME1/Flush

Appearance and Interfaces

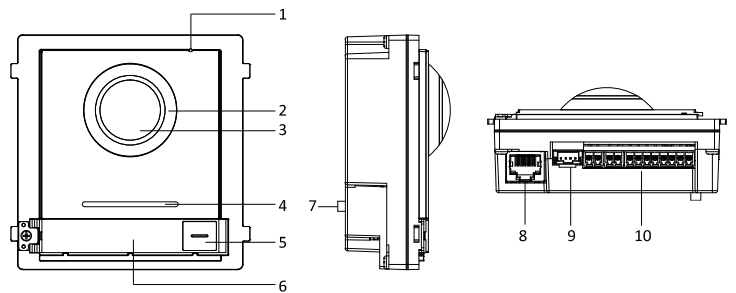

No.	Description	No.	Description
1	Microphone	6	Nametag
2	Low Illumination IR Supplement Light	7	TAMPER
3	Built-in Camera	8	Network Interface
4	Loudspeaker	9	Module-connecting Interface (output)
5	Call Button	10	Terminals

Dimension

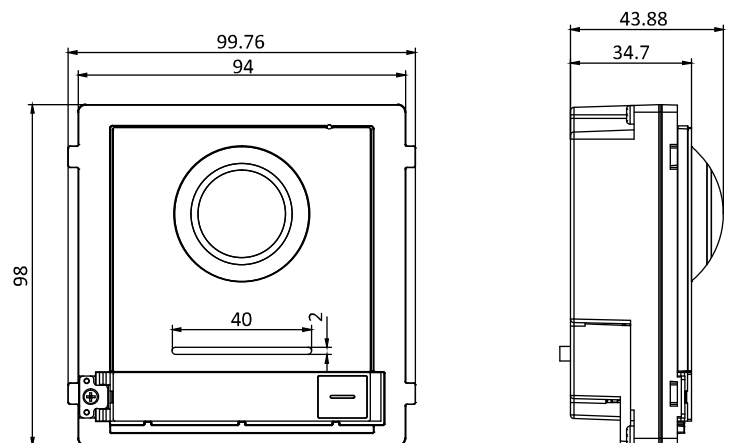

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com