# DS-KABD8003-RS3 Protective Shield





### **Key Feature**

Adapts to three-module surface mounting with protective shield.


# Specification


| Parameters  |   |
|-------------|---|
| Material    | SECC                                    |
| Working     | -40° C to +60° C(-40° F to 140° F)      |
| temperature |   |
| Working     | 10% to 95%                              |
| humidity    |   |
| Dimension   | 325.8 × 116.4 × 58 mm (12.83" × 4.58" × |
|             | 2.28")                                  |
| Weight      | 702.3 g                                 |

#### **Available Model**

DS-KABD8003-RS3



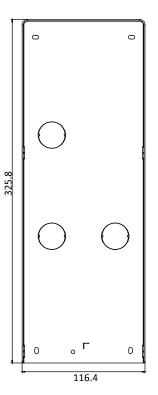



Unit : mm

# **HIKVISIO**N

#### Installation

- Paste the installation Sticker 1 onto the wall. Make sure the sticker is placed leveled via measuring with the gradienter.
  Drill 4 holes align to the screw holes on the sticker.
  - The suggested size of hole is 6 (diameter) × 25 (depth) mm.
- 2. Remove the sticker and insert the expansion sleeves into the screw holes.

Fix the mounting frame and protective shield onto the wall with 4 expansion bolts.

Thread the module-connecting lines across the thread holes of the frame.

Pass the main unit connecting lines across the thread hole to the top grid.


Connect the cables and module-connecting line 1 to the

corresponding interfaces of the main unit, then place the main unit into the upper grid.

Connect the other end of the module-connecting line1 to the input interface of the sub module. Connect two sub modules via module-connecting line 2.

Organize the line with cable tie in the package.

- 3. Insert the modules in to the frame after wiring. Main unit must be placed in the top grid.
- 4. Use the hexagon wrench in the package fix the cover onto the frame.

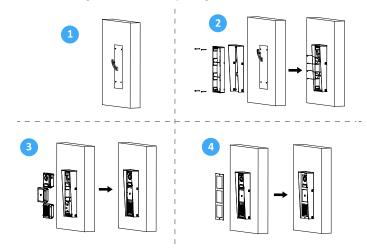

Distributed by

**HIKVISIO**N<sup>°</sup>

#### Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T +1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T +61-2-8599-4233 salesau@hikvision.com

Hikvision India T +91-22-28469900 sales@pramahikvision.com

Hikvision Canada T +1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T +662-275-9949 sales.thailand@hikvision.com Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia T +601-7652-2413 sales.my@hikvision.com Hikvision UK & Ireland T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 [10] 0351172 sale.africa@hikvision.com

Hikvision France T +33(0)1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-(0)31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T +62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com

© Hikvision Digital Technology Co., Ltd. 2019 | Data subject to change without notice |