

**DS-D5024FN10**  
**24 inch FHD VA Monitor**



- Ultra-thin device body with ultra-thin border for 3 sides.
- 8 bit LVDS HD (1920 × 1080) display.
- 178° ultra-wide view screen.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.

## ▪ Specification


	Model	DS-D5024FN10
<b>Display</b>	Screen Size	23.8 inch
	Active Display Area	527.04 mm (H) × 296.46 mm (V)
	Resolution	1920 × 1080
	Backlight	E-LED
	Pixel Pitch	0.2745 (H) mm × 0.2745 (V) mm
	Brightness	250 cd/m <sup>2</sup>
	Viewing Angle	178° (H)/178° (V)
	Color Depth	8 bit
	Contrast Ratio	4000 : 1
	Response Time	6.5 ms (typ) (G to G) OD 5 ms
	Refresh Rate	60 Hz
	Haze	Anti-Glare, 3H (Without Haze)
	Reliability	7 × 24 H
	Color Gamut	72% NTSC
<b>Interface</b>	Video & Audio Input	HDMI 1.4 × 1, VGA × 1
	Video & Audio Output	None
	Data Transmission Interface	None
	Control Interface	None
<b>Power</b>	Power Supply	DC 12 V, 2.5 A
	Power Consumption	≤ 30 W
	Standby Consumption	≤ 0.5 W
<b>Working Environment</b>	Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Working Humidity	20% to 80% RH (Non-Condensing)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Storage Humidity	20% to 80% RH (Non-Condensing)
<b>General</b>	Casing Material	Plastic
	VESA	100 mm × 100 mm (4-M4 × 10 mm)
	Bezel Width	1.8 mm (top/left/right), 21.4 mm (bottom)
	Product Dimensions (W × H × D)	538.40 (W) mm × 326.35 (H) mm × 37.50 (D) mm (without stand) 538.40 (W) mm × 407.10 (H) mm × 186.37 (D) mm (with stand)
	Package Dimensions (W × H × D)	600 (W) mm × 408 (H) mm × 94 (D) mm
	Net Weight	2.634 ± 0.5 kg
	Gross Weight	3.340 ± 0.5 kg
	Packing List	Monitor × 1, Base component × 1, Power adapter (12 V, 2.5 A) × 1, HDMI cable (1.5 m) × 1, User manual × 1, Multilingual manual × 1
	Remarks	If the appearance and parameters in this specification vary from the actual product, the later prevails. You can also consult local sale staff.

▪ **Physical Interface**

Interface	Description	Interface	Description
HDMI	HDMI 1.4 digital signal input interface	VGA	VGA analog signal input interface
DC	DC 12 V, 2.5 A		



HDMI



VGA




DC

▪ **Available Model**

DS-D5024FN10

▪ **Dimension**

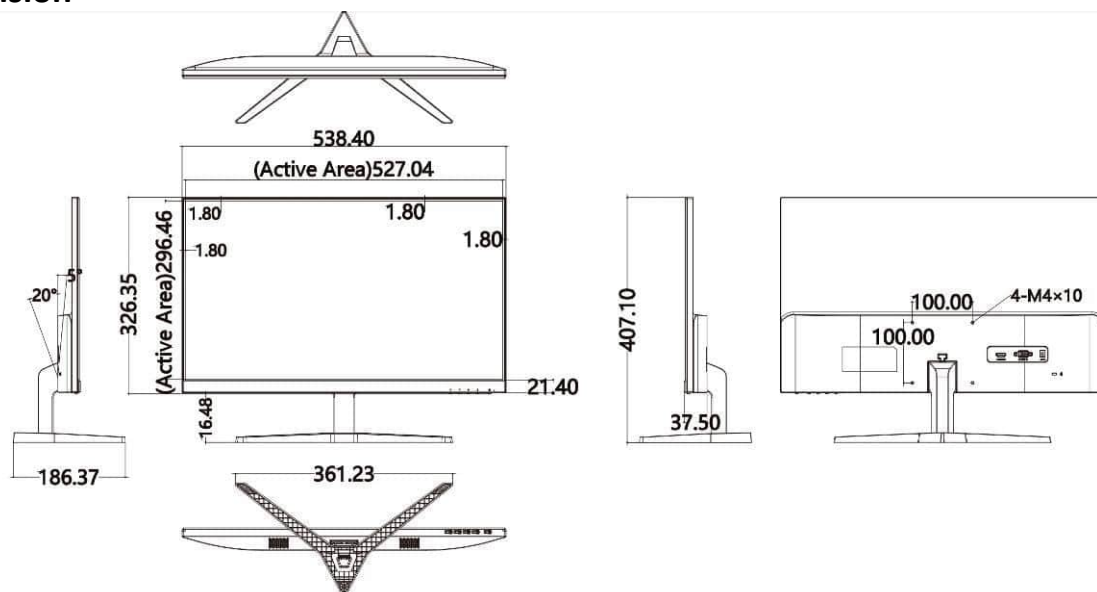

Unit: mm

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

