

AXIS P39-R Network Camera Series

High-performance cameras for surveillance in vehicles



- > Compact, rugged design
- > HDTV
- > Traffic light mode
- > Edge storage
- > Audio-in
- > I/O ports

The high-performance AXIS P39-R Network Camera Series is specially designed for video surveillance in buses, trains, subway cars and emergency vehicles.

The compact, rugged and discreet AXIS P39-R Network Camera Series has IP67-rated protection against dust and water, and can withstand tough conditions such as vibrations, shocks, bumps and temperature fluctuations. In addition, the cameras' active tampering alarm can detect tampering attempts such as blocking or spray-painting.

The series includes AXIS P3904-R cameras with 720p resolution, AXIS P3905-R cameras with 1080p resolution and AXIS P3915-R with 1080p resolution as well as audio-in and I/O capabilities. Each of these variants are available with either a male RJ45 connector or a rugged M12 connector.

The cameras are specially adapted to respond quickly to changes in light levels, ensuring that high image quality is maintained.


Traffic Light mode helps to better distinguish colors of traffic lights in very dark scenes.

The cameras are designed for quick and reliable installation. The desired field of view and a leveled image can be easily achieved by using the supplied lens tool to direct and rotate the ball that holds the lens and image sensor. The tool can also be used to exchange and focus the lens when a lens with a different angle of view is required. The cameras provide a pixel counter for verifying that the pixel resolution of an object meets specific requirements.





www.use-ip.co.uk
01304 827609

Lenses field of view

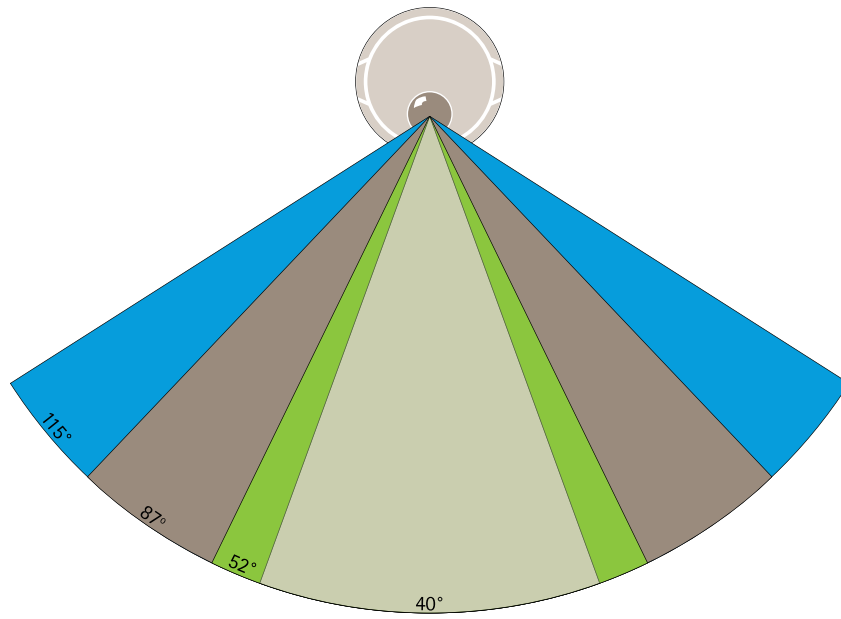

Standard lens field of view: 87°. Optional lenses field of view: 2.8 mm: 115°, 6 mm: 52° and 8 mm: 40°.

Dimensions

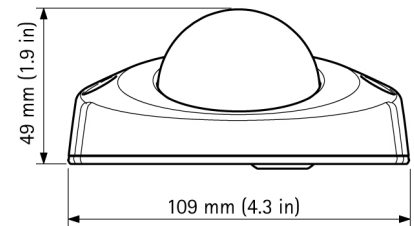

Technical Specifications - AXIS P39-R Network Camera Series

Models	AXIS P3904-R: RJ45/M12, HDTV 720p AXIS P3905-R: RJ45/M12, HDTV 1080p AXIS P3915-R: RJ45/M12, HDTV 1080p		Event triggers	Intelligent video, Time scheduled, Edge storage events AXIS P3915-R: Audio Level, External input
Camera			Event actions	File upload: FTP, HTTP, Email Notification: Email, HTTP, TCP Video recording to edge storage, Pre- and post-alarm video buffering, Status LED activation AXIS P3915-R: External output activation, Video and audio recording to edge storage
Image sensor	Progressive scan RGB CMOS 1/2.8"		Data streaming	Event data
Lens	M12 mount, Fixed iris, Megapixel resolution Horizontal angle of view: 87° Vertical angle of view: 47° Diagonal angle of view: 102°		Built-in installation aids	Pixel counter
Minimum illumination	Color: 0.2 lux		General	
Shutter time	Power line frequency 50 Hz: 1/28000 s to 2 s Power line frequency 60 Hz: 1/33500 s to 2 s		Casing	Aluminum and polycarbonate casing
Camera angle adjustment	Pan ±30°, Tilt 15-90°, Rotation ±175°		Memory	256 MB RAM, 128 MB Flash
Video			Power	Power over Ethernet IEEE 802.3af/802.3at Type 1 Class 2
Video compression	H.264 Main and Baseline Profiles (MPEG-4 Part 10/AVC) Motion JPEG		Connectors	AXIS P39-R RJ45: Male RJ45 10BASE-T/100BASE-TX AXIS P39-R M12: Rugged, Female, D-coded M12 connector with rotatable coupling nut All connectors support Power over Ethernet AXIS P3915-R: 3.5 mm Audio In connector, Mono, I/O 4-pin, 1 input, 1 output +12 V DC/15mA
Resolutions	AXIS P3904-R: 1280x720 to 160x90 AXIS P3905-R: 1920x1080 to 160x90 AXIS P3915-R: 1920x1080 to 160x90		Edge storage	microSD/microSDHC/microSDXC slot supporting memory cards with up to 64 GB of storage. For best recording performance, use an SDHC or SDXC card with speed class 10 Support for recording to dedicated network-attached storage (NAS)
Frame rate	30 fps in all resolutions		Operating conditions	-30°C to 60°C (-22°F to 140°F) 10% to 95% RH (non-condensing)
Video streaming	Multiple, individually configurable streams in H.264 and Motion JPEG Controllable frame rate and bandwidth VBR/CBR H.264		Approvals	EN 55022 Class B, EN 55024, EN 50581, EN 61000-6-1, EN 61000-6-2, EN 61000-3-2, EN 61000-3-3, FCC Part 15 Subpart B Class B, ICES-003 Class B, VCCI Class B, C-tick AS/NZS CISPR 22 Class B, KCC KN22 Class B, KN24, IEC/EN/UL 60950-1, IEC 60529 IP67, NEMA 250 Type 4X, IEC/EN 62262 IK08, IEC 62236-4, EN 50155 Class T3, EN 45545, EN 50498, EN 50121, ECE R10 rev.04 (E approval)
Image settings	Compression, Color, Brightness, Sharpness, Contrast, White balance, Exposure control, Exposure zones, Backlight compensation, Fine tuning of behavior at low light, Wide dynamic range - dynamic contrast Rotation: 0°, 90°, 180°, 270° including Corridor Format, Text and image overlay, Privacy mask, Mirroring of images, Traffic Light mode		Weight	AXIS P3904-R RJ45: 269 g (0.59 lb) AXIS P3905-R RJ45: 269 g (0.59 lb) AXIS P3915-R RJ45: 285 g (0.63 lb) AXIS P3904-R M12: 277 g (0.61 lb) AXIS P3905-R M12: 277 g (0.61 lb) AXIS P3915-R M12: 293 g (0.65 lb)
Pan/Tilt/Zoom	Digital PTZ, Preset Positions, Guard Tour, Control Queue		Included accessories	Installation and Management Software CD, Installation guide, Drill hole template, Top cover tool, Lens tool, Allen key resitorx, Windows decoder 1-user license
Audio			Optional accessories	Lenses (2.8 mm F2.0, 6 mm F1.6, 8 mm F1.6), AXIS T94D015 Mounting Bracket, AXIS T94D025 Mounting Bracket, Power over Ethernet Network Coupler IP66, Network Cable Coupler Indoor
Audio streaming	AXIS P3915-R: Audio in, Simplex		Video management software	AXIS Camera Companion (included), AXIS Camera Station and video management software from Axis' Application Development Partners (not included). For more information, see www.axis.com/products/video/software
Audio compression	AXIS P3915-R: AAC LC 8/16 kHz, G.711 PCM 8 kHz, G.726 ADPCM 8 kHz, Configurable bit rate		Warranty	Axis 3-year warranty and AXIS Extended Warranty option, see www.axis.com/warranty
Audio input	AXIS P3915-R: External microphone input or line input		a. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (www.openssl.org), and cryptographic software written by Eric Young (ey@cryptsoft.com).	
Network				
Security	Password protection, IP address filtering, HTTPS ^a encryption, Digest authentication, User access log			
Supported protocols	IPv4/v6, HTTP, HTTPS ^a , SSL/TLS ^a , QoS Layer 3 DiffServ, FTP, CIFS/SMB, SMTP, Bonjour, UPnP™, SNMP v1/v2c/v3(MIB-II), DNS, DynDNS, NTP, RTSP, RTP, TCP, UDP, IGMP, RTCP, ICMP, DHCP, ARP, SOCKS, SSH			
System integration				
Application Programming Interface	Open API for software integration, including VAPIX® and AXIS Camera Application Platform, specifications at www.axis.com AXIS Video Hosting System (AVHS) with One-Click Camera Connection ONVIF Profile S, specification at www.onvif.org			
Intelligent video	Video motion detection, Active tampering alarm, AXIS Camera Application Platform enabling installation of additional applications AXIS P3915-R: Audio detection			

About Axis Communications

Axis offers intelligent security solutions that enable a smarter, safer world. As the global market leader in network video, Axis is driving the industry by continually launching innovative network products based on an open platform – delivering high value to customers through a global partner network. Axis has long-term relationships with partners and provides them with knowledge and ground-breaking network products in existing and new markets.

Axis has more than 1,600 dedicated employees in more than 40 countries around the world, supported by a network of over 65,000 partners across 179 countries. Founded in 1984, Axis is a Sweden-based company listed on NASDAQ OMX Stockholm under the ticker AXIS.

For more information about Axis, please visit our website www.axis.com.